



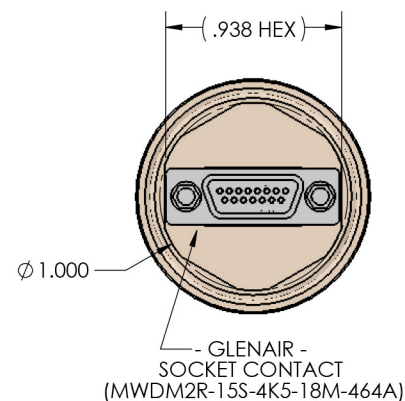

PEEK BODY

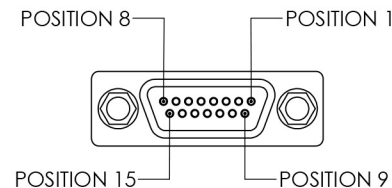

NOTES:

1. TEMPERATURE RATING: 392 F (200° C), CURRENT: 2 AMPS MAX
2. INSULATION RESISTANCE = 500MΩ @ 500VDC
3. CONTACTS ARE GOLD PLATED PER CANYON SPEC: QP-P-ENG-7.4-001 CURRENT REVISION.
4. INSERTION TESTING: 5000 CYCLES {ROTATING @ 5 RPM}
5. HALT TESTING: COLD STEP STRESS, HOT STEP STRESS, RAPID THERMAL CYCLE, VIBRATION STEP STRESS & COMBINED THERMAL / VIBRATION. {TEMPERATURE RANGE: -40 °C TO +200 °C VIBRATION: UP TO 80 G RMS}
6. THIS CONNECTOR IS ALSO AVAILABLE WITH 10 FLYING LEADS, REF: 915-0330-01

WIRING DIAGRAM

CONTACT	WIRE SIZE	COLOR	MDM PIN
A	24 AWG	BLACK	1
B	24 AWG	GREEN	6
C	24 AWG	WHITE	10
D	24 AWG	GRAY	9
E	24 AWG	VIOLET	8
F	24 AWG	BLUE	7
G	24 AWG	YELLOW	5
H	24 AWG	ORANGE	4
J	24 AWG	RED	3
K	24 AWG	BROWN	2

Canyon
Manufacturing Services, Inc.

TITLE: ASSY., 10-COND., FEMALE
ROTATABLE, 15P MDM, LARGE DIA.
915-0330-02, REV 2, SALES