


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
C.2	REVISED FRONT WASHER DESIGN	7/27/2022	SWright

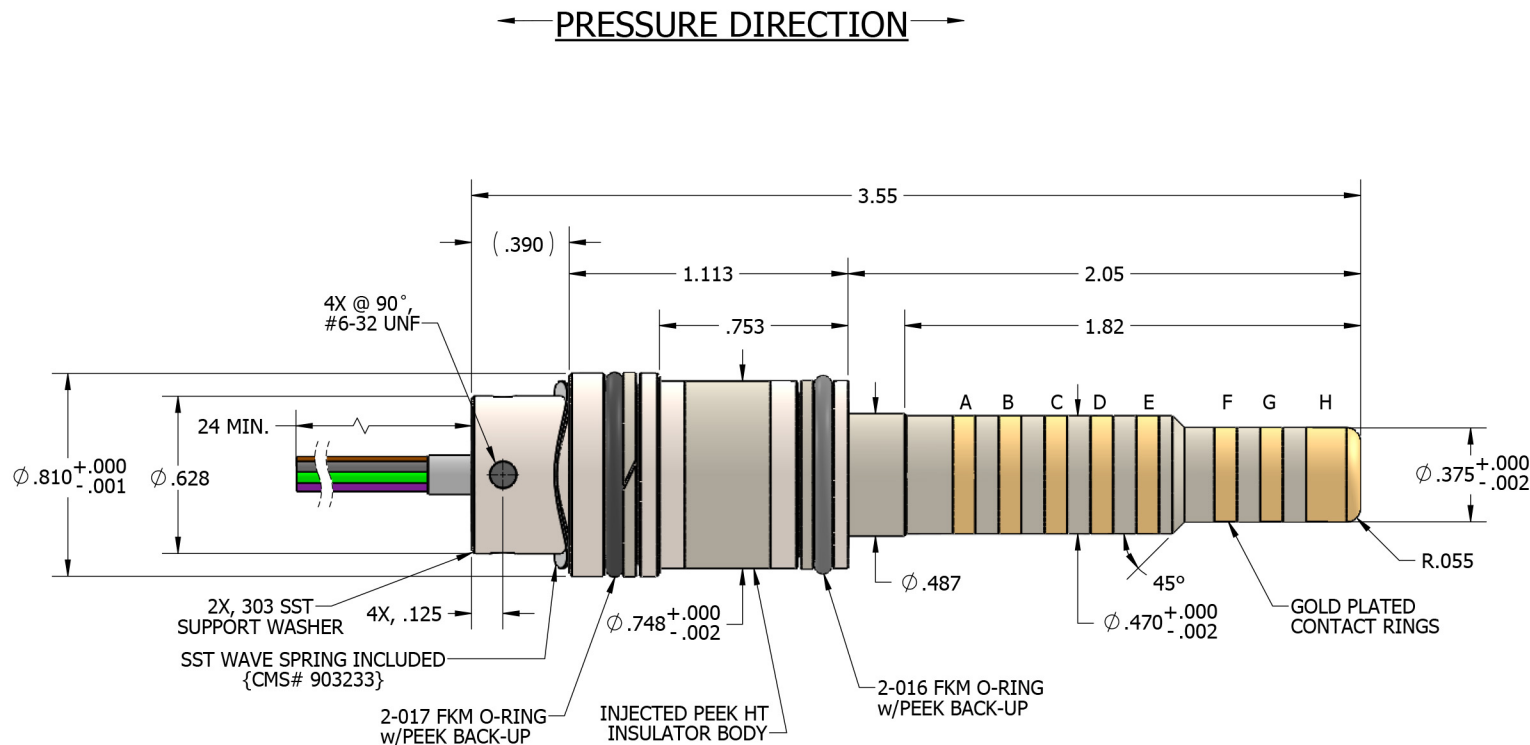

NOTES:

- TEMPERATURE RATING: 392°F (200°C)
Pressure Rating: 25K psi
Current: 2 AMPS MAX
INSULATION RESISTANCE = 500M Ω @ 500VDC
- CONTACTS ARE GOLD PLATED PER CANYON SPEC:
QP-ENG-7.4-001 CURRENT REVISION.
- WIRE LENGTH TO BE 24" MIN. OR AS DETERMINED BY CUSTOMER.
- PART NUMBER TO ORDER: 915-0353-05, CURRENT REVISION.

WIRING DIAGRAM			
CONTACT	WIRE SIZE	COLOR	LENGTH
A	24 AWG	ORANGE	24"
B	24 AWG	BROWN	24"
C	24 AWG	BLACK	24"
D	24 AWG	GREEN	24"
E	24 AWG	VIOLET	24"
F	24 AWG	YELLOW	24"
G	24 AWG	BLUE	24"
H	24 AWG	RED	24"



TITLE:
ASSEMBLY, 8 CONDUCTOR, MALE,
HT-HP BI-DIRECTIONAL
915-0353-05, REV C, SALES