



REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
PROTO-A	INITIAL RELEASE	3/17/2021	SWright
(PROTO-B)	REMOVED OD FLATS AND ADDED ANTI-ROTATION FEATURE TO BODY OD, INCREASED LENGTH BY .04	4/27/2021	SWright
(PROTO-C)	WIRE LENGTH CHANGED, FROM 24"	5/6/2021	SWright
A	INITIAL RELEASE TO PRODUCTION	5/17/2021	SWright

D

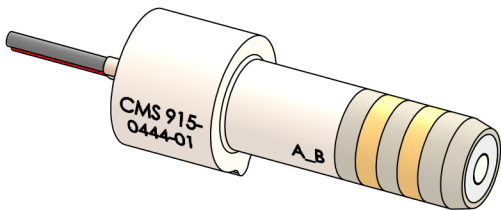

C

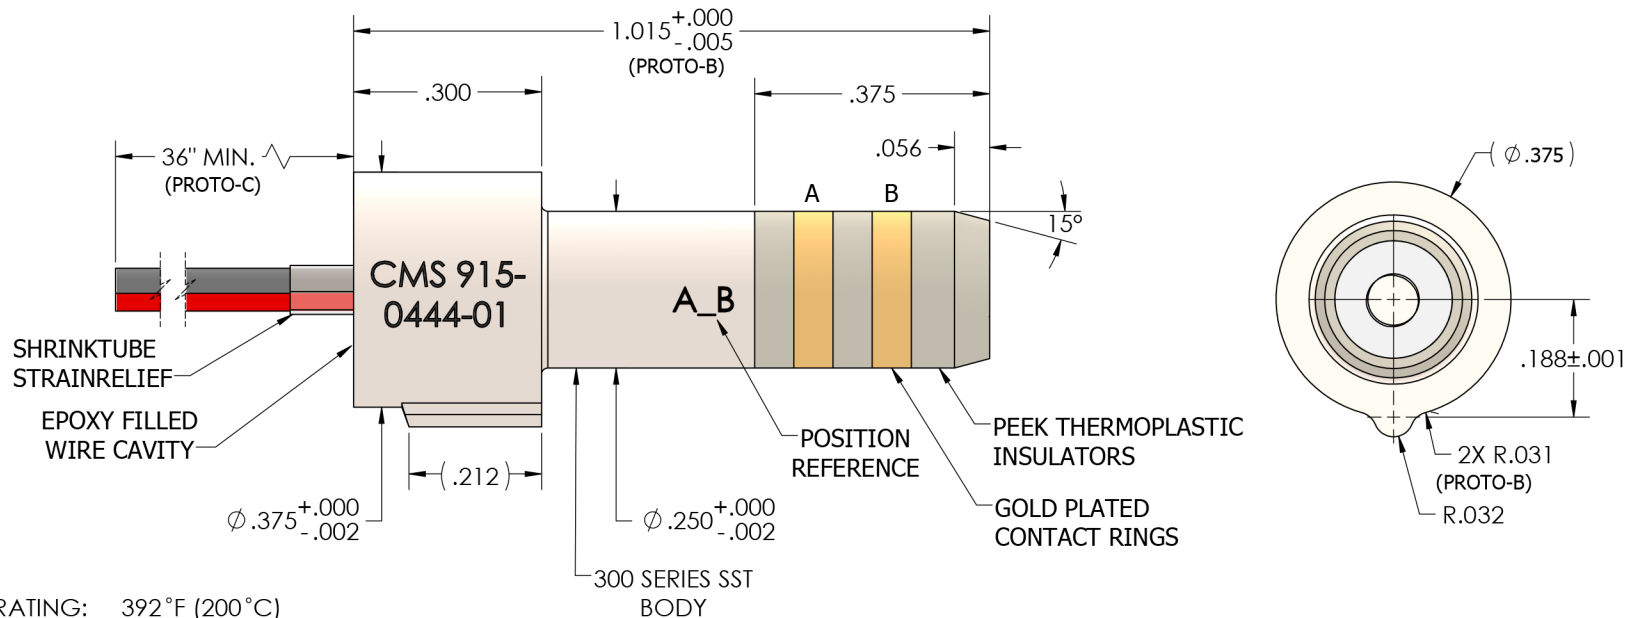

B

NOTES:

- TEMPERATURE RATING: 392°F (200°C)
CURRENT: 2 AMPS MAX
INSULATION RESISTANCE = 500M Ω @ 500VDC
- CONTACTS ARE GOLD PLATED PER CANYON SPEC:
QP-ENG-7.4-001 CURRENT REVISION.
- WIRE LENGTH TO BE 36" MIN. OR AS DETERMINED BY CUSTOMER.
- PART NUMBER TO ORDER: 915-0444-01, CURRENT REVISION.

A

WIRING DIAGRAM			
CONTACT	COLOR	WIRE SIZE	LENGTH
A	BLACK	24 AWG, 600v, 200°C	36"
B	RED	24 AWG, 600v, 200°C	36"

(PROTO-C)



TITLE: ASSEMBLY, 2-CONDUCTOR
MALE MINI ROTATABLE
915-0444-01, REV A , SALES

D

C

B

A