
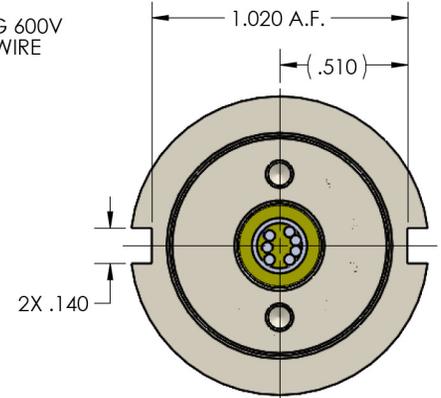
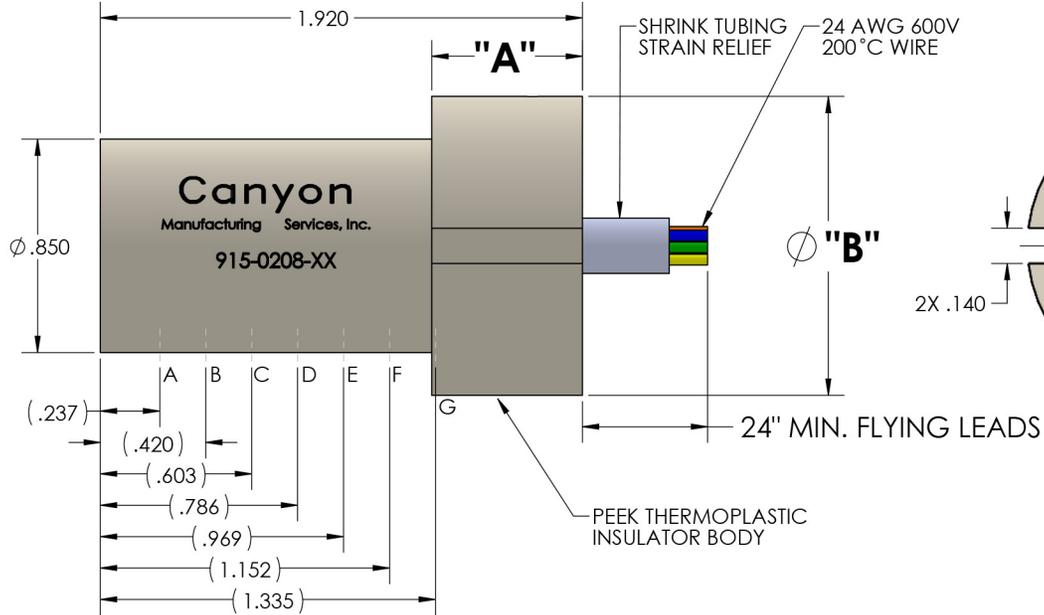


PART NO.	DIMENSION "A"	DIMENSION "B"
915-0208-01	.600"	Ø 1.190"
915-0208-02	.500"	Ø 1.190"
915-0208-03	.600"	Ø .960"
915-0208-04	.500"	Ø .960"

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
3	ADDED NEW DIAMETER OPTIONS IN TABLE	7/29/2015	P.BALCOM

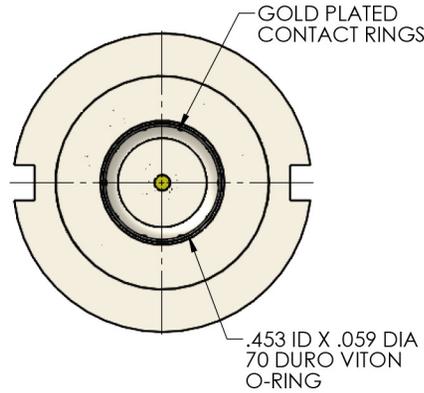

NOTES:

1. TEMPERATURE RATING: 392 °F (200 °C)

CURRENT: 2 AMPS MAX

INSULATION RESISTANCE = 500M Ω @ 500VDC

2. CONTACTS ARE GOLD PLATED PER CANYON SPEC:

QP-ENG-7.4-001 CURRENT REVISION.

3. WIRE LENGTH TO BE 24" MIN. OR AS DETERMINED BY CUSTOMER.

4. PART NUMBER TO ORDER: (SEE CHART), CURRENT REVISION.

WIRING DETAILS			
CONTACT	WIRE SIZE	COLOR	LENGTH
A	24 AWG	ORANGE	24"
B	24 AWG	BROWN	24"
C	24 AWG	BLACK	24"
D	24 AWG	RED	24"
E	24 AWG	YELLOW	24"
F	24 AWG	GREEN	24"
G	24 AWG	BLUE	24"



TITLE:
 ASSEMBLY, 7 CONDUCTOR
 ROTATABLE, FEMALE
 915-0208-xx, REV 3, SALES