




| REVISIONS |                                 |           |          |
|-----------|---------------------------------|-----------|----------|
| REV.      | DESCRIPTION                     | DATE      | APPROVED |
| E         | REDESIGNED FOR NEW CONTACT PINS | 9/29/2015 | P.BALCOM |



GOLD PLATED CONTACT SPRING POINTS  
10 PER POSITION



.453 ID X .059 THK FKM 75 DURO O-RING  
OPTIONAL SERIAL NUMBER ENGRAVING

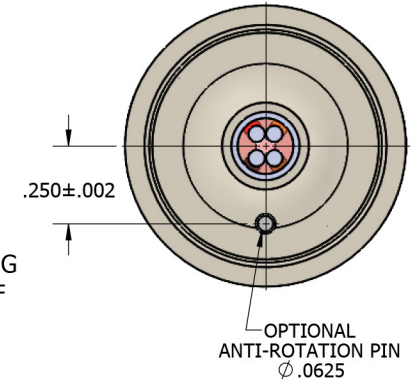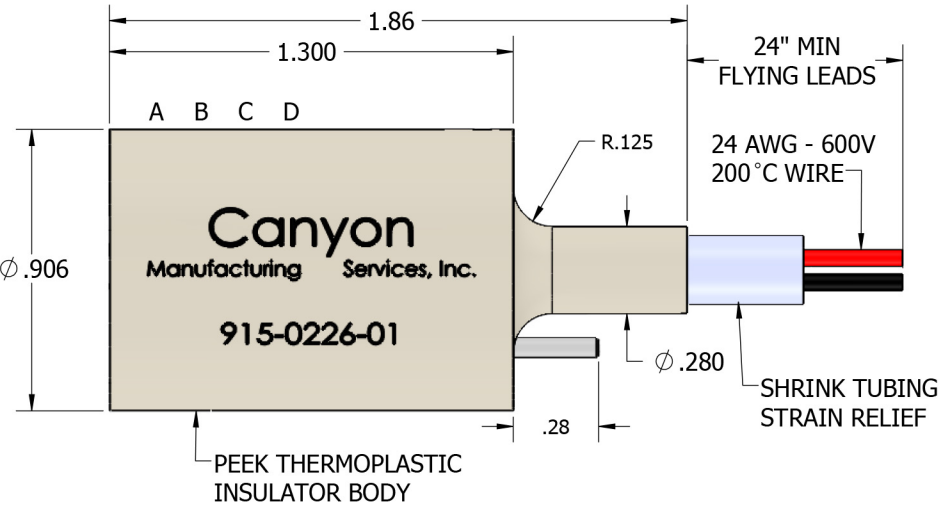

OPTIONAL ANTI-ROTATION PIN  
Ø .0625

### NOTES:

- TEMPERATURE RATING: 392 °F (200 °C)  
CURRENT: 2 AMPS MAX  
INSULATION RESISTANCE = 500M Ω @ 500VDC
- CONTACTS ARE GOLD PLATED PER CANYON SPEC:  
QP-ENG-7.4-001 CURRENT REVISION.
- WIRE LENGTH TO BE 24" MIN. OR AS DETERMINED BY CUSTOMER.
- PART NUMBER TO ORDER: 915-0226-01, CURRENT REVISION.

### WIRING DIAGRAM

| CONTACT | WIRE SIZE | COLOR  | MIN LENGTH |
|---------|-----------|--------|------------|
| A       | 24 AWG    | ORANGE | 24"        |
| B       | 24 AWG    | BROWN  | 24"        |
| C       | 24 AWG    | BLACK  | 24"        |
| D       | 24 AWG    | RED    | 24"        |



TITLE: ASSEMBLY, 4 CONDUCTOR,  
FEMALE, STRAIGHT IN-LINE  
915-0226-01, Rev E, SALES