




NOTES:

1. TEMPERATURE RATING: 392 F (200° C), CURRENT: 2 AMPS MAX
2. INSULATION RESISTANCE = 500MΩ @ 500VDC
3. CONTACTS ARE GOLD PLATED PER CANYON SPEC:
QP-P-ENG-7.4-001 CURRENT REVISION.
4. INSERTION TESTING: 5000 CYCLES {ROTATING @ 5 RPM}
5. HALT TESTING: COLD STEP STRESS, HOT STEP STRESS,
RAPID THERMAL CYCLE, VIBRATION STEP STRESS
& COMBINED THERMAL / VIBRATION.
{TEMPERATURE RANGE: -40°C TO +200°C
VIBRATION: UP TO 80 G RMS}

WIRING DIAGRAM (M22759/43)		
CONTACT	WIRE SIZE	COLOR
A	24 AWG	BLACK
B	24 AWG	BROWN
C	24 AWG	RED
D	24 AWG	ORANGE
E	24 AWG	YELLOW
F	24 AWG	GREEN
G	24 AWG	BLUE
H	24 AWG	VIOLET
J	24 AWG	GRAY
K	24 AWG	WHITE

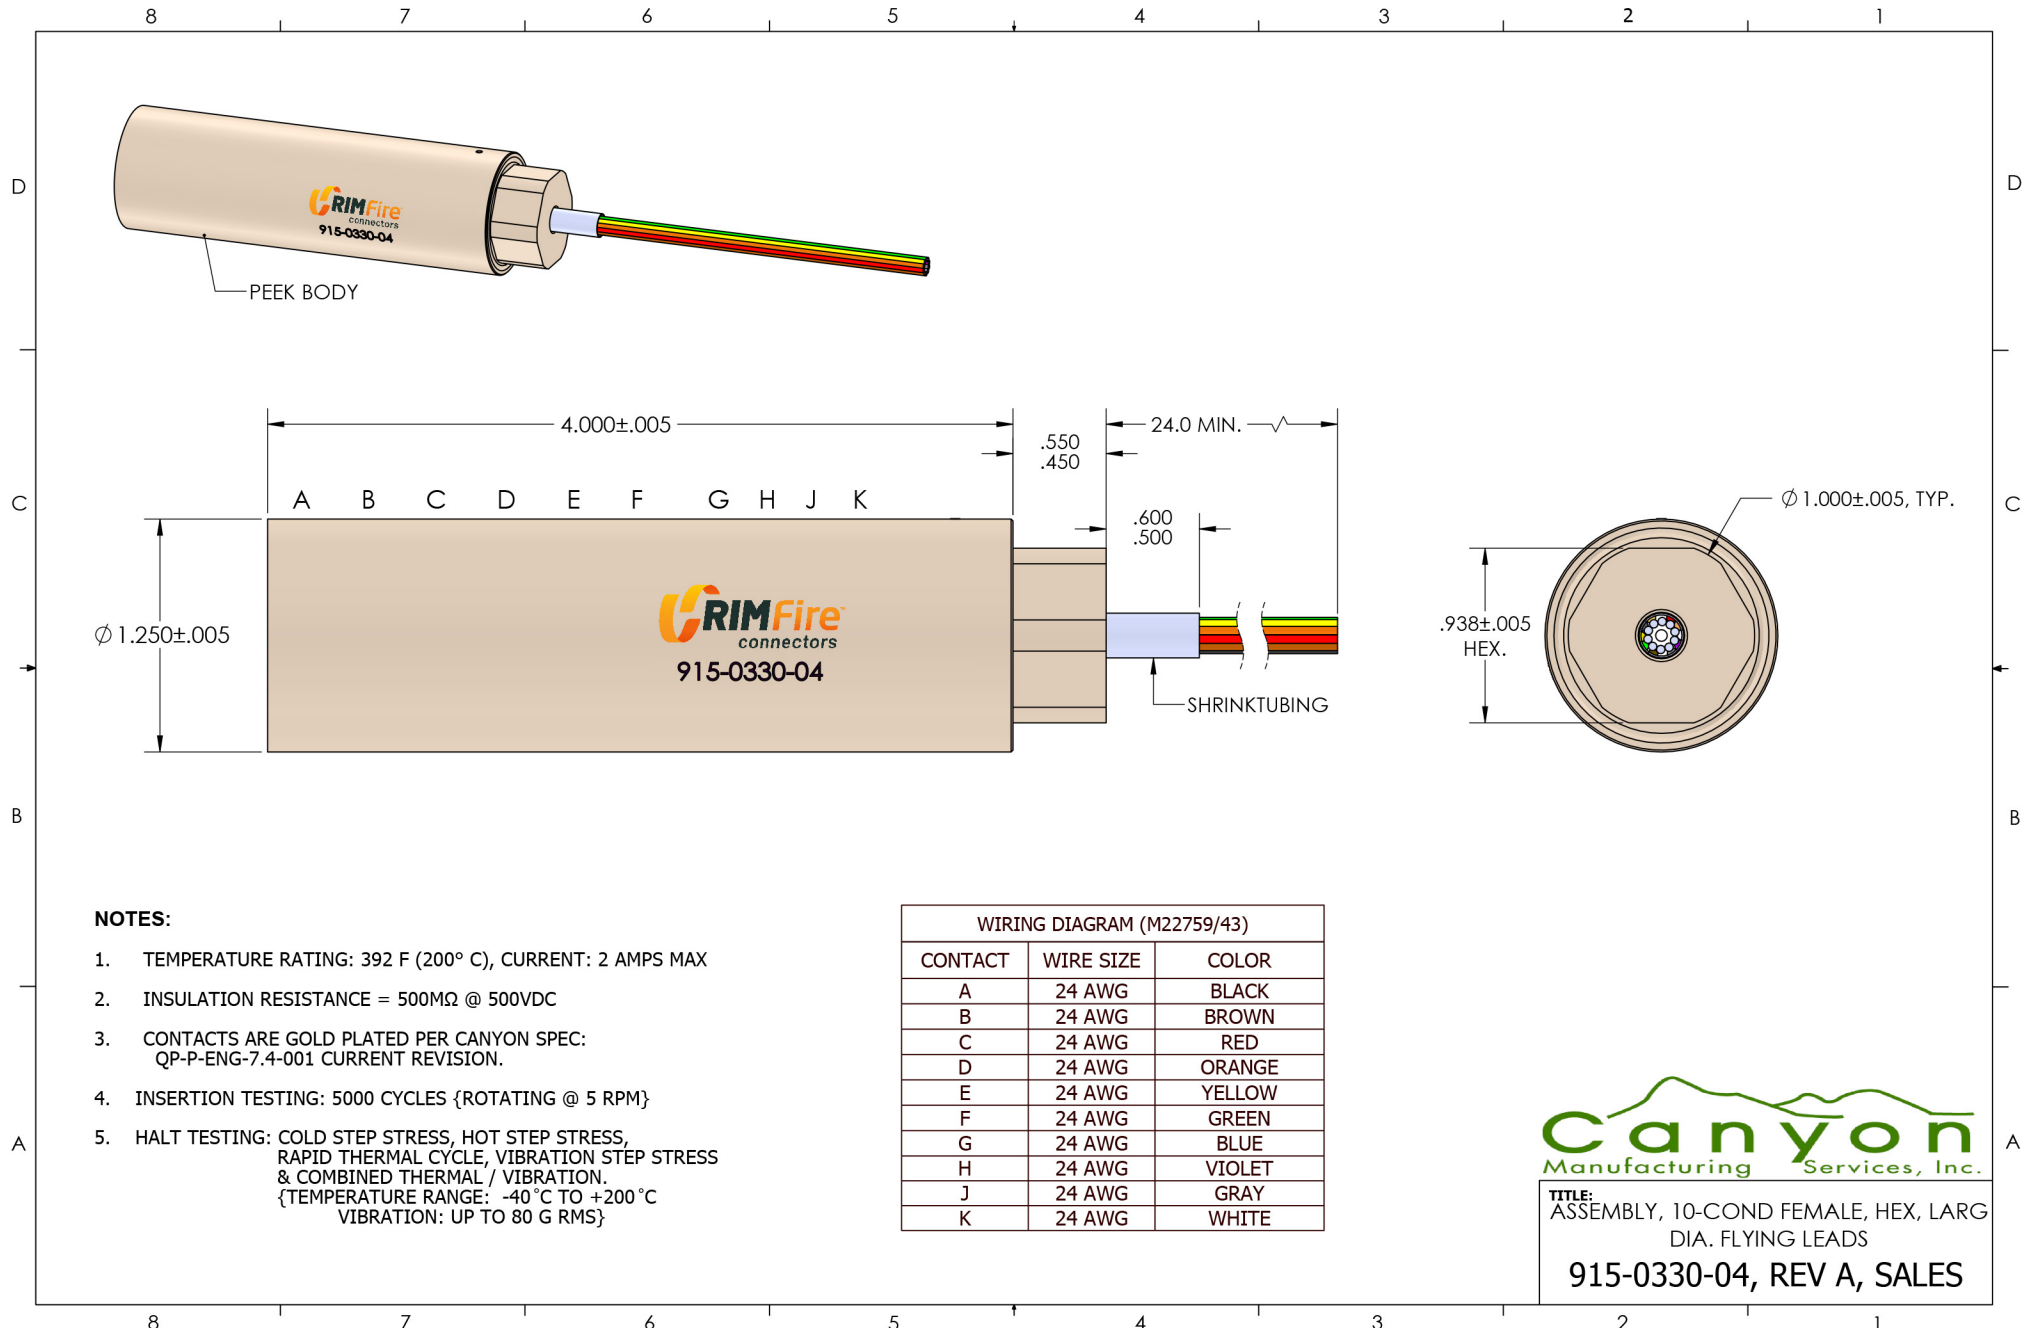

TITLE:
ASSEMBLY, 10-COND FEMALE, HEX, LARG
DIA. FLYING LEADS
915-0330-04, REV A, SALES