

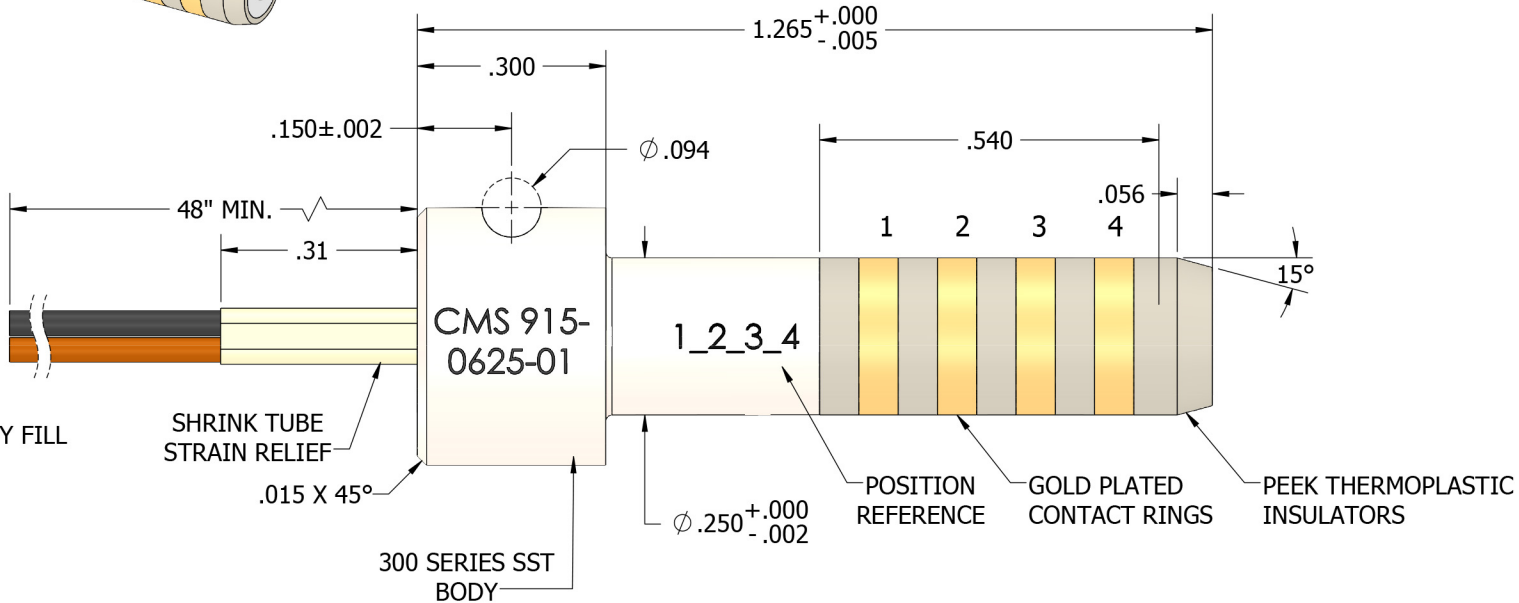


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	RELEASE TO PRODUCTION	8/30/2024	SWright

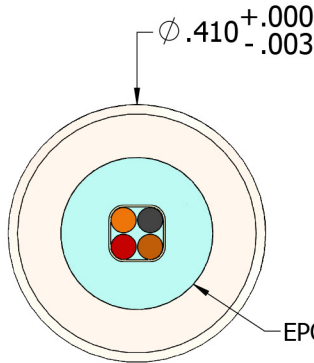

- NOTES:**
1. TEMPERATURE RATING: 392 °F (200 °C)
CURRENT: 2 AMPS MAX
INSULATION RESISTANCE = 500M Ω @ 500VDC
 2. CONTACTS ARE GOLD PLATED PER CANYON SPEC:
QP-ENG-7.4-001 CURRENT REVISION.
 3. WIRE LENGTH TO BE 48" MIN. OR AS DETERMINED BY CUSTOMER.
 4. PART NUMBER TO ORDER: 915-0625-01, CURRENT REVISION.
MATING CONNECTOR: 915-0633-01

WIRING DIAGRAM (M22759/43)			
CONTACT	COLOR	WIRE SIZE	LENGTH
1	BLACK	24 AWG, 600v, 200°C	48"
2	BROWN	24 AWG, 600v, 200°C	48"
3	RED	24 AWG, 600v, 200°C	48"
4	ORANGE	24 AWG, 600v, 200°C	48"

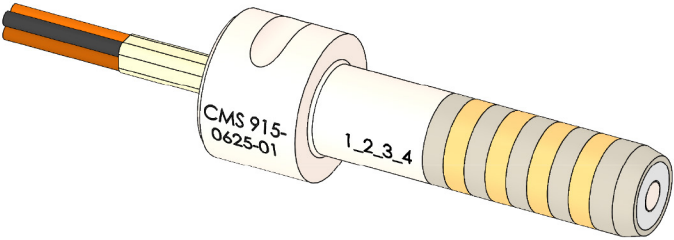

TITLE: ASSEMBLY, 4-CONDUCTOR
MALE, MINI-ROTATABLE
915-0625-01, REV A, SALES