


24 AWG - 600 V - 200°C
DUAL INSULATION WIRE

SHRINK TUBING
STRAIN RELIEF

PEEK THERMOPLASTIC
INSULATOR BODY

GOLD PLATED
CONTACTS

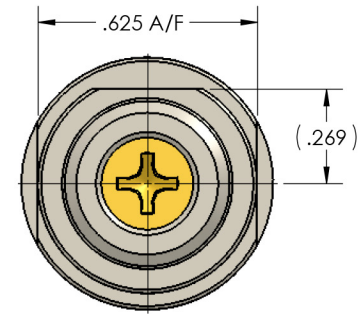

NOTES:

- TEMPERATURE RATING: 392°F (200°C)
CURRENT: 2 AMPS MAX
VOLTAGE: 500 VDC
CONTACT TO CONTACT ISOLATION: 500M OHMS @ 500 VDC
- CONTACTS ARE PLATED PER CANYON SPEC: QP-ENG-7.4-001 CURRENT REVISION.
- WIRE LENGTH TO BE 24" MIN. OR AS DETERMINED BY CUSTOMER.
- PART NUMBER TO ORDER: 915-0117-01, CURRENT REVISION.

REVISIONS

REV.	DESCRIPTION	DATE	APPROVED
E	UPDATED NOTES	8/17/2015	P.BALCOM

WIRING DIAGRAM

CONTACT	COLOR	WIRE SIZE	MIN LENGTH
A	BLACK	24 AWG	24"
B	BROWN	24 AWG	24"
C	RED	24 AWG	24"
D	ORANGE	24 AWG	24"
E	YELLOW	24 AWG	24"

DRAWN	S.GIBSON	08/28/2010
CHECKED	J.STEELE	08/28/2010
APPROVED	P.BALCOM	08/28/2010

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES [MM]
TOLERANCES:
ANGULAR: ±.50°
TWO PLACE DECIMAL ±.015
THREE PLACE DECIMAL ±.005
FOUR PLACE DECIMAL ±.0005
FILLET: R.032 MAX
REMOVE ALL BURRS AND BREAK SHARP
EDGES .015 MAX



TITLE:
ASSEMBLY, 5 CONDUCTOR, MALE, IN-LINE

SIZE	MATERIAL	DWG. NO.	REV
B	SEE NOTES	915-0117-01-SALES	E

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CANYON MANUFACTURING INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CANYON MANUFACTURING INC. IS PROHIBITED.

SHEET 1 OF 1