
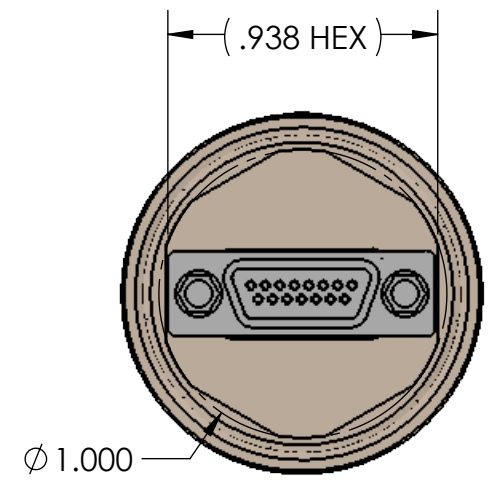
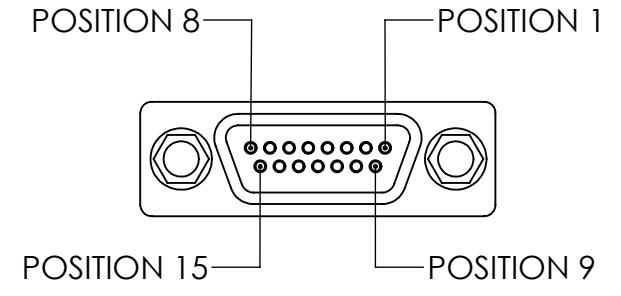


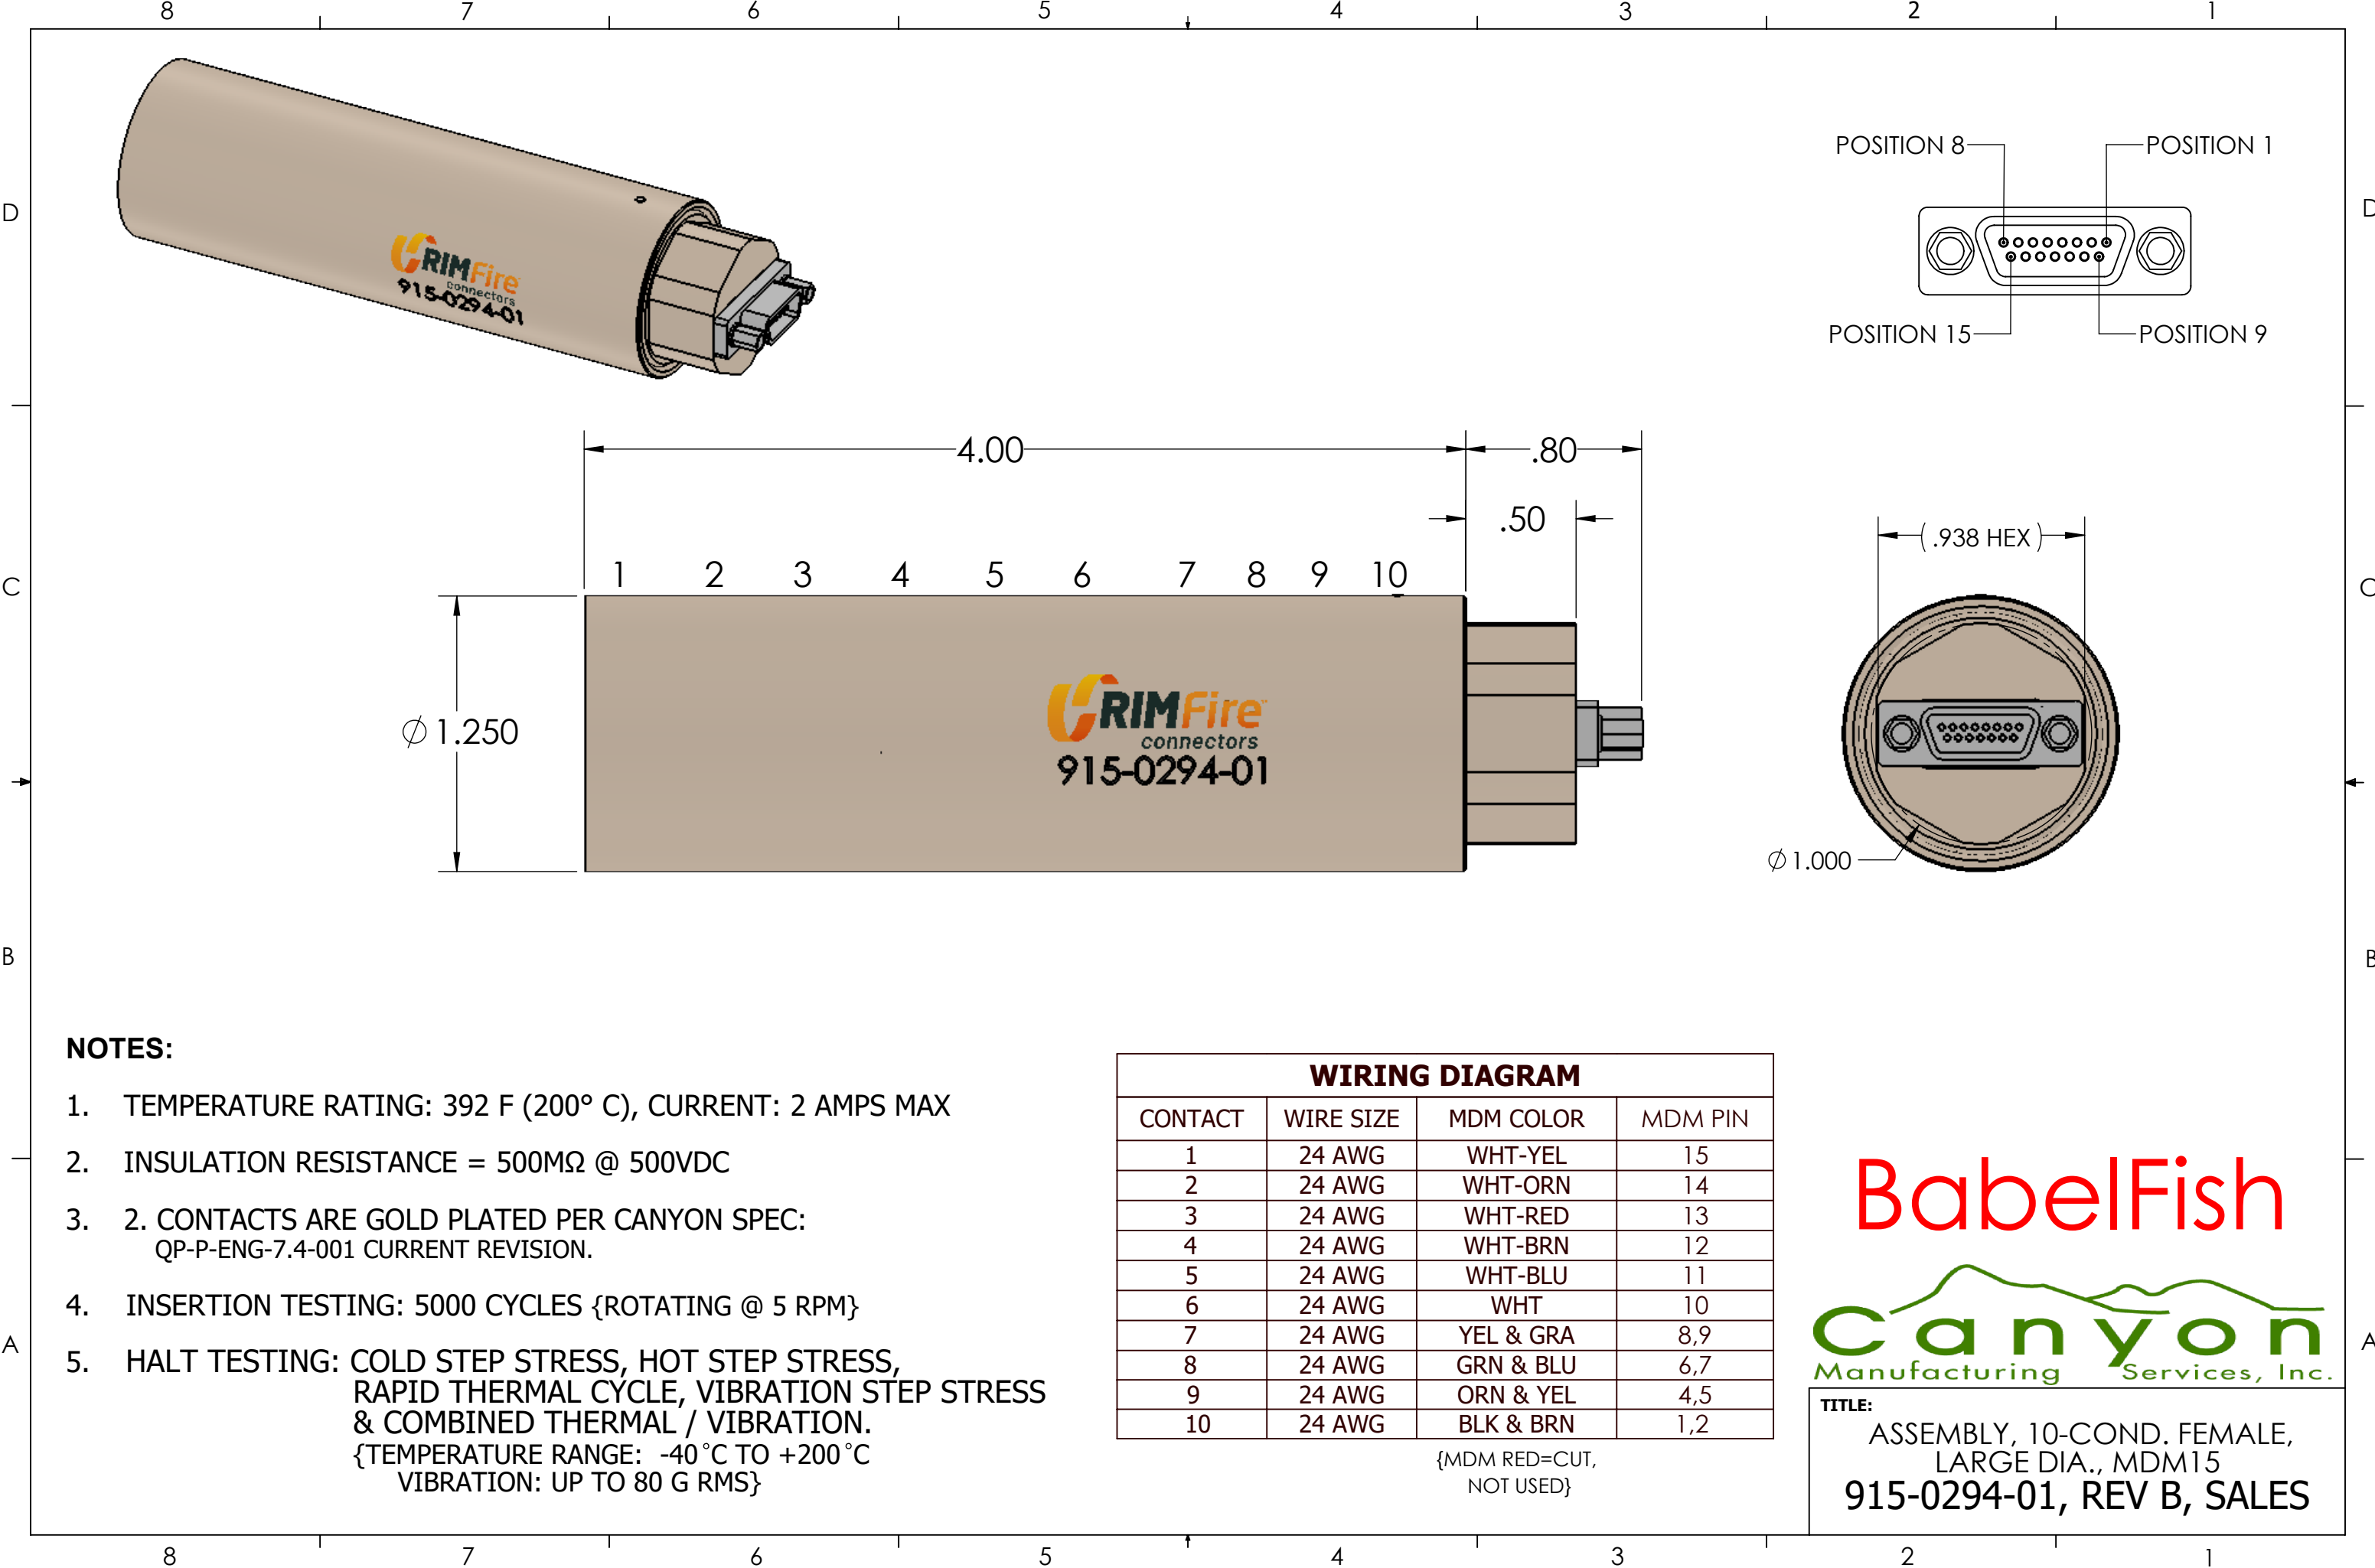

NOTES:

- 1. TEMPERATURE RATING: 392 F (200° C), CURRENT: 2 AMPS MAX
- 2. INSULATION RESISTANCE = 500MΩ @ 500VDC
- 3. 2. CONTACTS ARE GOLD PLATED PER CANYON SPEC: QP-P-ENG-7.4-001 CURRENT REVISION.
- 4. INSERTION TESTING: 5000 CYCLES {ROTATING @ 5 RPM}
- 5. HALT TESTING: COLD STEP STRESS, HOT STEP STRESS, RAPID THERMAL CYCLE, VIBRATION STEP STRESS & COMBINED THERMAL / VIBRATION. {TEMPERATURE RANGE: -40 °C TO +200 °C VIBRATION: UP TO 80 G RMS}

WIRING DIAGRAM			
CONTACT	WIRE SIZE	MDM COLOR	MDM PIN
1	24 AWG	WHT-YEL	15
2	24 AWG	WHT-ORN	14
3	24 AWG	WHT-RED	13
4	24 AWG	WHT-BRN	12
5	24 AWG	WHT-BLU	11
6	24 AWG	WHT	10
7	24 AWG	YEL & GRA	8,9
8	24 AWG	GRN & BLU	6,7
9	24 AWG	ORN & YEL	4,5
10	24 AWG	BLK & BRN	1,2

{MDM RED=CUT, NOT USED}



TITLE:
ASSEMBLY, 10-COND. FEMALE,
LARGE DIA., MDM15
915-0294-01, REV B, SALES