
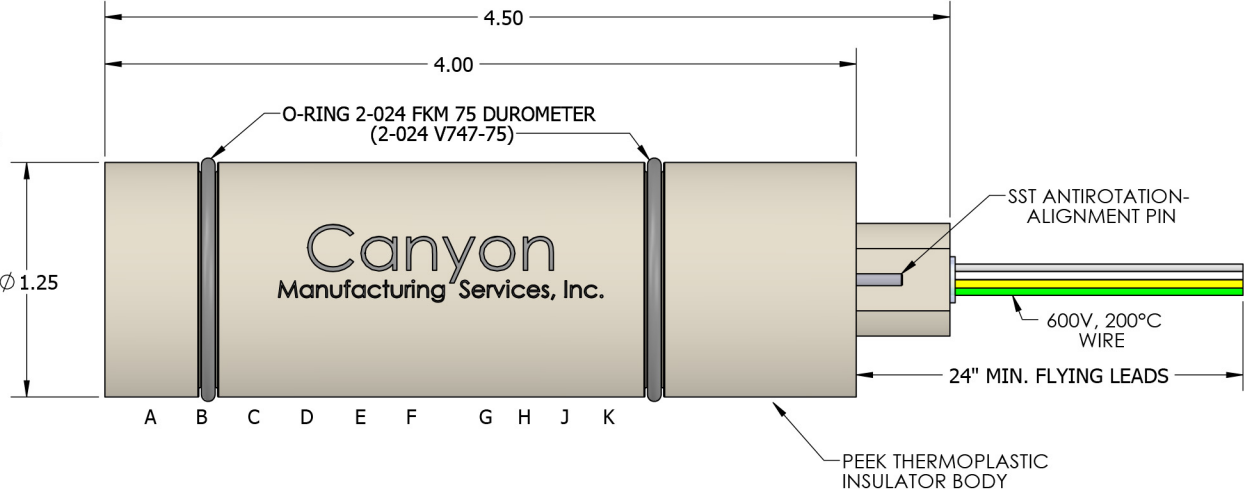



REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
X	UNRELEASED		

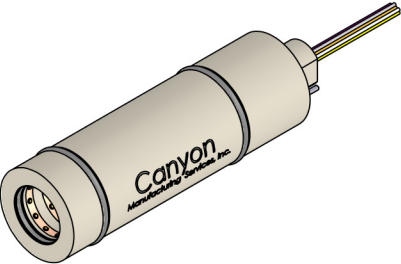

NOTES:

- TEMPERATURE RATING: 392°F (200°C)
CURRENT: 2 AMPS MAX
INSULATION RESISTANCE = 500M Ω @ 500VDC
- CONTACTS ARE GOLD PLATED PER CANYON SPEC:
QP-ENG-7.4-001 CURRENT REVISION.
- WIRE LENGTH TO BE 24" MIN. OR AS DETERMINED BY CUSTOMER.

WIRING DIAGRAM			
CONTACT	WIRE SIZE	COLOR	LENGTH
A	24 AWG	BLACK	24"
B	24 AWG	BROWN	24"
C	24 AWG	RED	24"
D	24 AWG	ORANGE	24"
E	24 AWG	YELLOW	24"
F	24 AWG	GREEN	24"
G	24 AWG	BLUE	24"
H	24 AWG	VIOLET	24"
J	24 AWG	GRAY	24"
K	24 AWG	WHITE	24"



TITLE: ASSEMBLY, FEMALE ROTATABLE,
10-POS., STAB HYBRID, LARGE DIA.
915-0507-01, REV X, SALES