

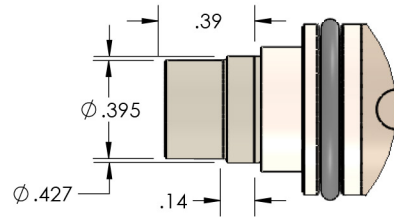

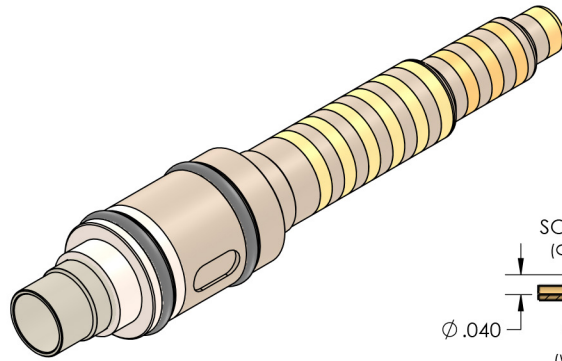


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	4/3/2024	SWright

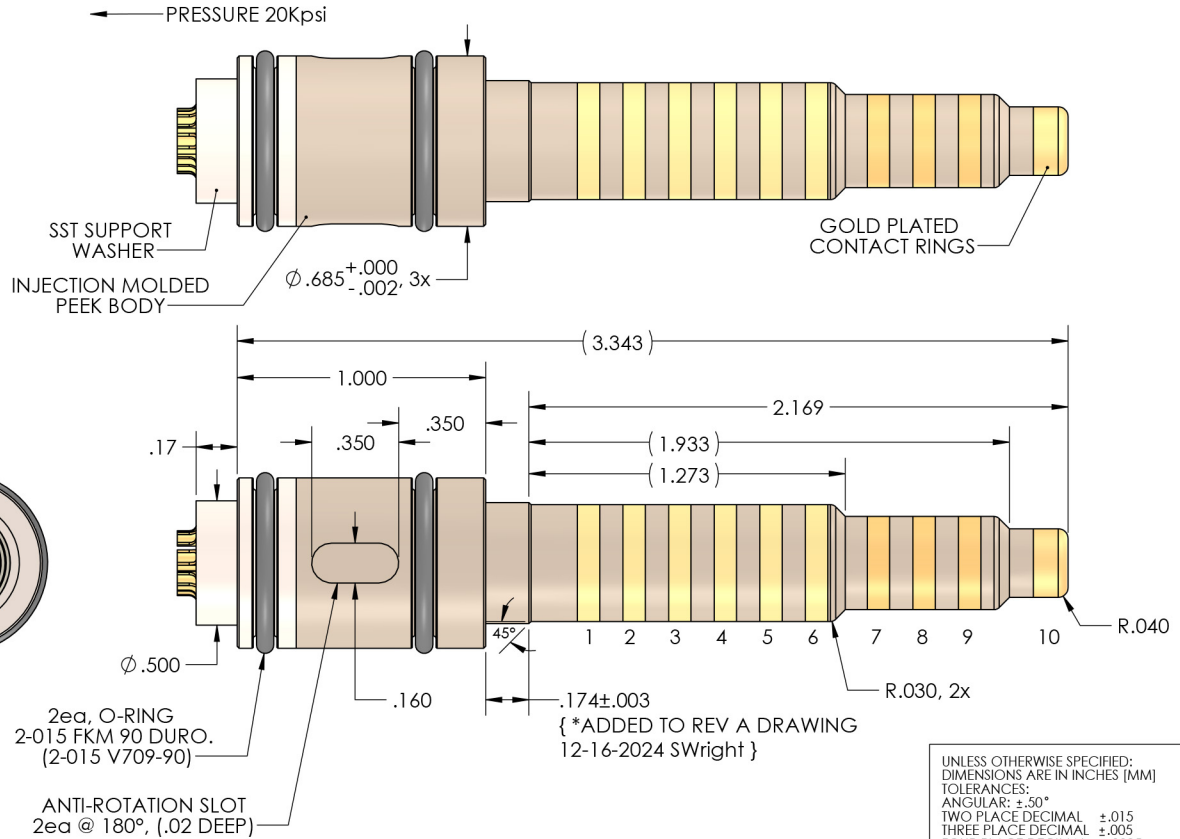

OPTIONAL:
PEEK POTTING CUP
CMS# 915-0416-01



PROPERTIES:

- TEMPERATURE RATING: 392°F (200°C)
CURRENT: 2 AMPS MAX
INSULATION RESISTANCE = 500M Ω @ 500VDC
- PRESSURE RATING: 20,000 PSI @ 200°C
- CONTACTS ARE GOLD PLATED PER CANYON SPEC: QP-ENG-7.4-001 CURRENT REVISION.
- INSERTION TESTING: 5000 CYCLES ROTATING @ 5 RPM'S.
- HALT TESTING: COLD STEP STRESS, HOT STEP STRESS, RAPID THERMAL CYCLE, VIBRATION STEP STRESS & COMBINED THERMAL AND VIBRATION.
ENVIRONMENTAL CONDITIONS OF HALT TESTING:
TEMPERATURE RANGE: -40°C TO +200°C
VIBRATION: UP TO 80 Grms

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES [MM]
TOLERANCES:
ANGULAR: ±.50°
TWO PLACE DECIMAL ±.015
THREE PLACE DECIMAL ±.005
FOUR PLACE DECIMAL ±.0005
FILLET: R.032 MAX
REMOVE ALL BURRS AND BREAK SHARP EDGES .015 MAX

Canyon
Manufacturing Services, Inc.

TITLE: ASSEMBLY, 10-COND., MALE
ROTATABLE, HT/HP, 3 DIA.

915-0682-01 - REV A - SALES

*Descriptive dimensions of an existing feature not a revision.