



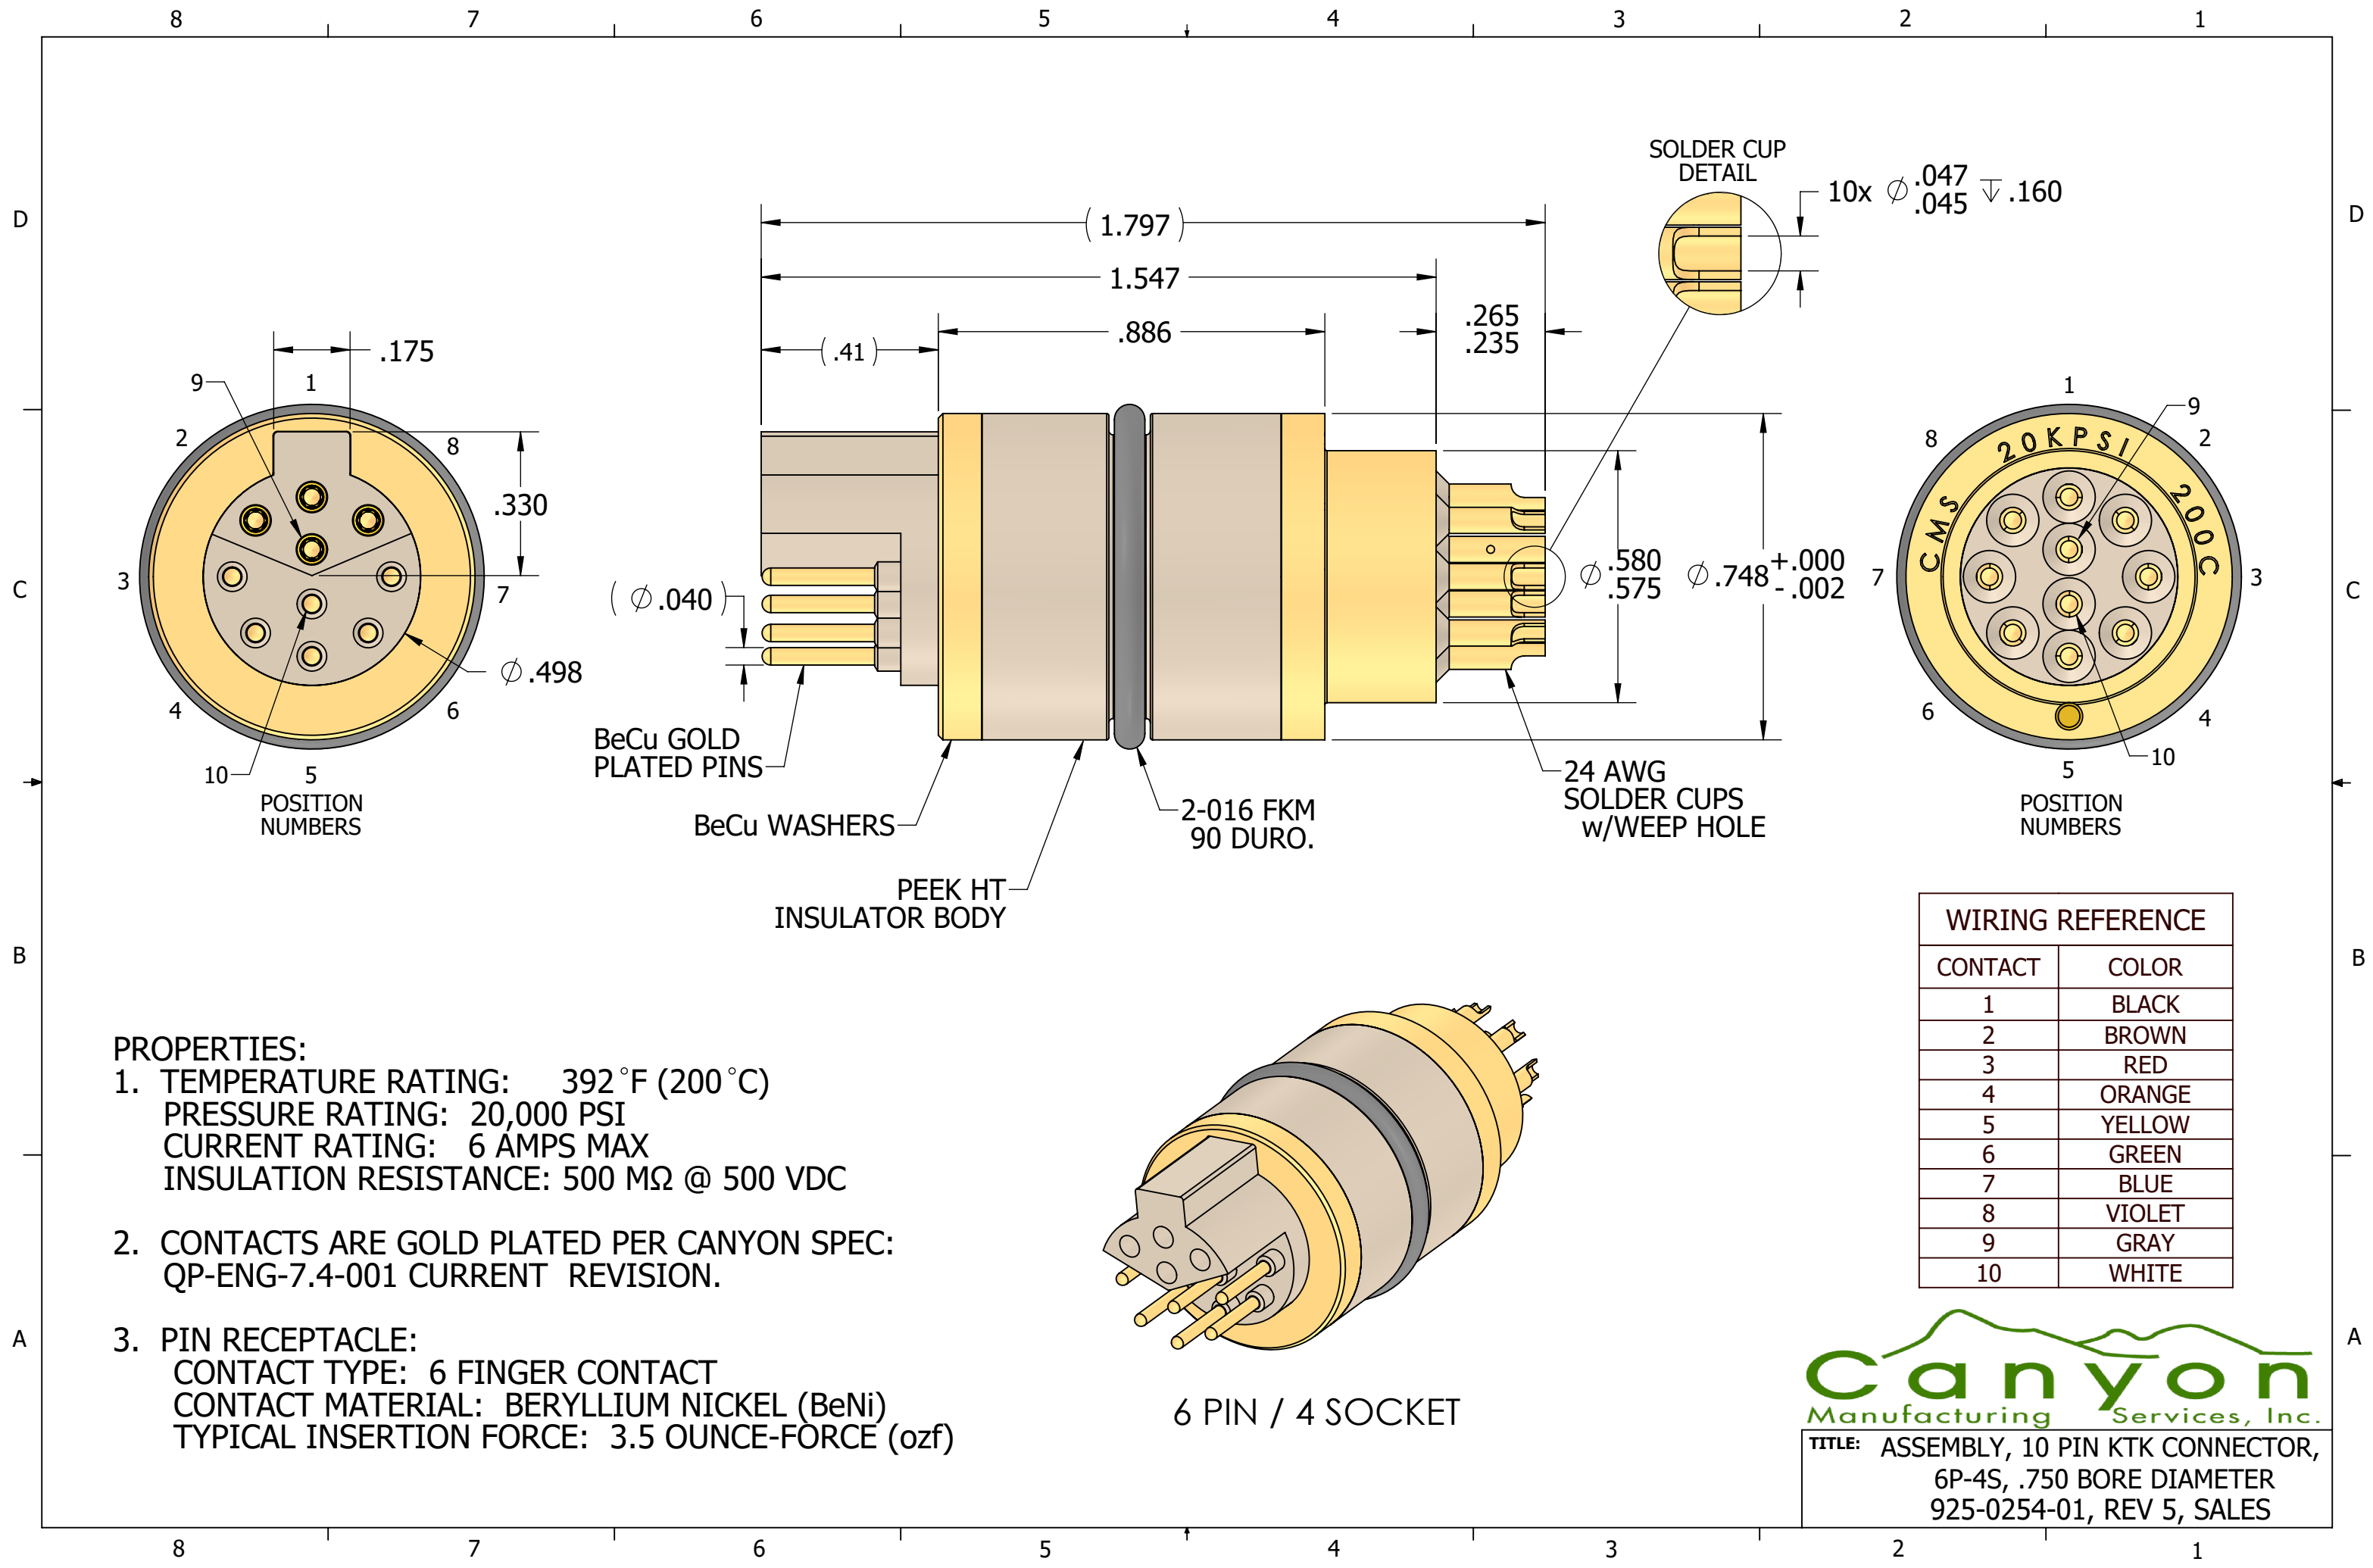

PROPERTIES:

1. TEMPERATURE RATING: 392 °F (200 °C)
PRESSURE RATING: 20,000 PSI
CURRENT RATING: 6 AMPS MAX
INSULATION RESISTANCE: 500 MΩ @ 500 VDC
2. CONTACTS ARE GOLD PLATED PER CANYON SPEC:
QP-ENG-7.4-001 CURRENT REVISION.
3. PIN RECEPTACLE:
CONTACT TYPE: 6 FINGER CONTACT
CONTACT MATERIAL: BERYLLIUM NICKEL (BeNi)
TYPICAL INSERTION FORCE: 3.5 OUNCE-FORCE (ozf)

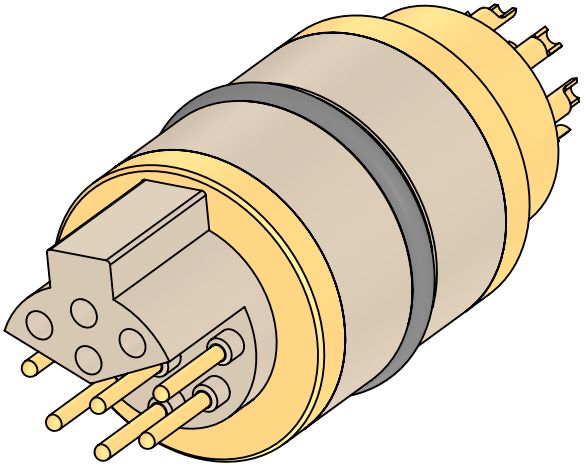

6 PIN / 4 SOCKET

WIRING REFERENCE	
CONTACT	COLOR
1	BLACK
2	BROWN
3	RED
4	ORANGE
5	YELLOW
6	GREEN
7	BLUE
8	VIOLET
9	GRAY
10	WHITE



TITLE: ASSEMBLY, 10 PIN KTK CONNECTOR,
6P-4S, .750 BORE DIAMETER
925-0254-01, REV 5, SALES