


WIRING DIAGRAM		
CONTACT	COLOR	WIRE SIZE
A	ORANGE	24 AWG
B	BROWN	24 AWG
C	BLACK	24 AWG
D	RED	24 AWG
E	YELLOW	24 AWG
F	GREEN	24 AWG
G	VLUE	24 AWG
H	VIOLET	24 AWG



PROPERTIES:

- TEMPERATURE RATING: 392°F (200°C)
CURRENT: 2 AMPS MAX
INSULATION RESISTANCE = 500M Ω @ 500VDC
- CONTACTS ARE GOLD PLATED PER CANYON SPEC: QP-ENG-7.4-001 CURRENT REVISION.
- INSERTION TESTING: 5000 CYCLES ROTATING @ 5 RPM'S.
- HALT TESTING:
COLD STEP STRESS, HOT STEP STRESS, RAPID THERMAL CYCLE,
VIBRATION STEP STRESS & COMBINED THERMAL AND VIBRATION.
ENVIRONMENTAL CONDITIONS OF HALT TESTING:
TEMPERATURE RANGE: -40°C TO +200°C
VIBRATION: UP TO 80 Grms

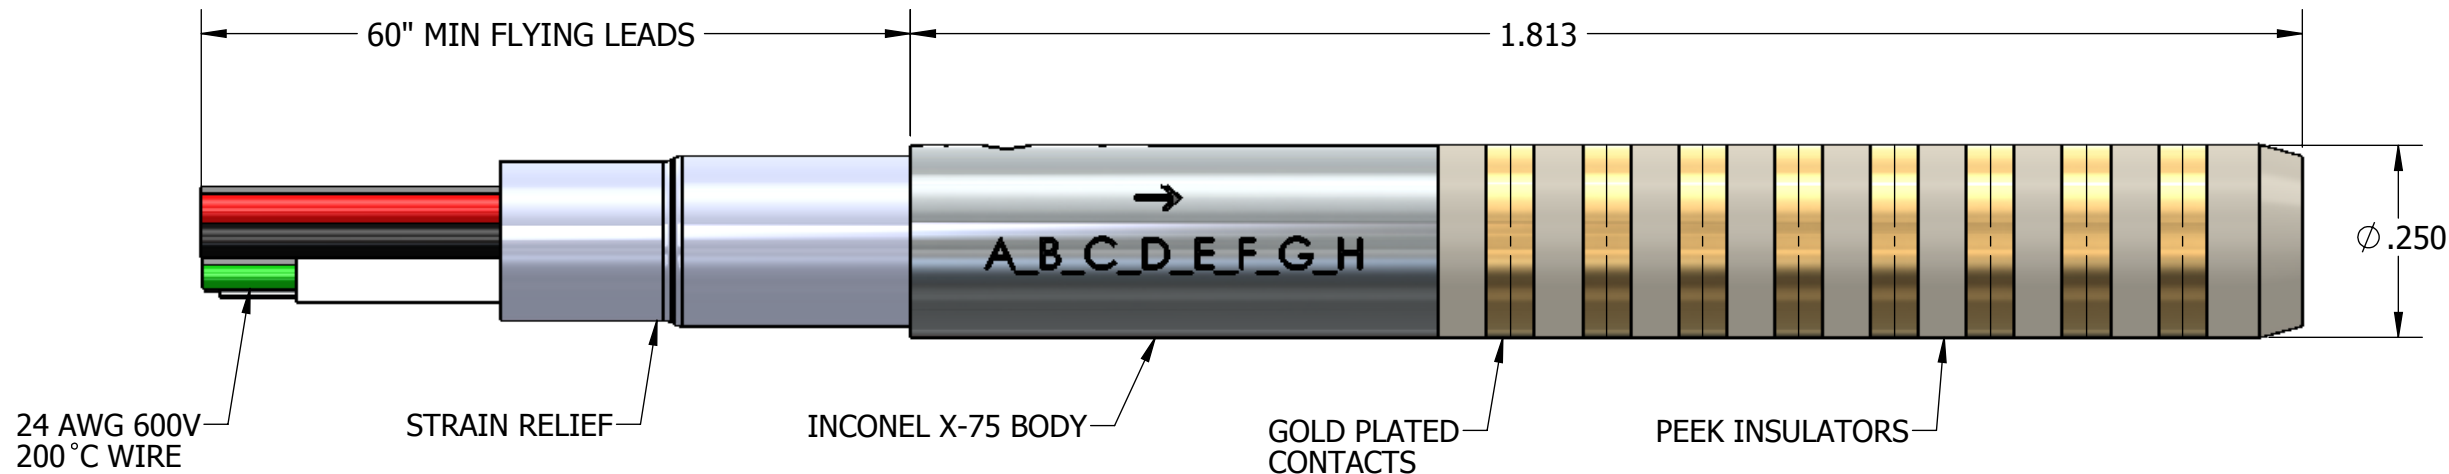

TITLE:
ASSEMBLY, 8 CONDUCTOR, MALE, MINI
915-0400-01