

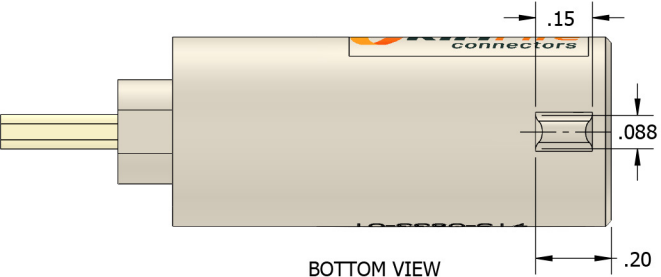
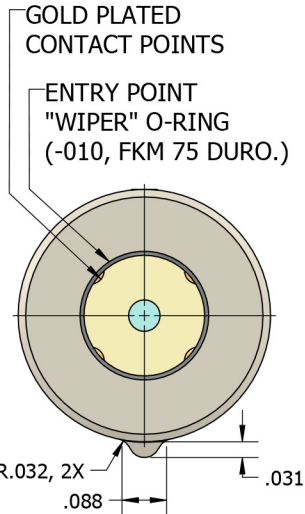
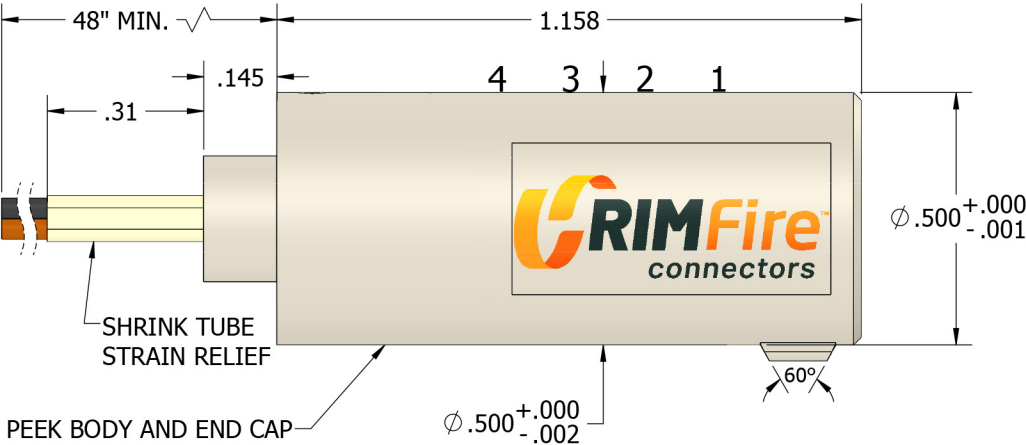


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	RELEASE TO PRODUCTION	8/30/2024	SWright

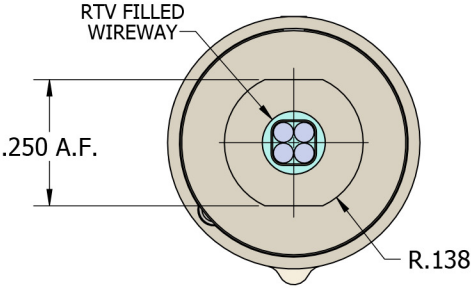

BOTTOM VIEW

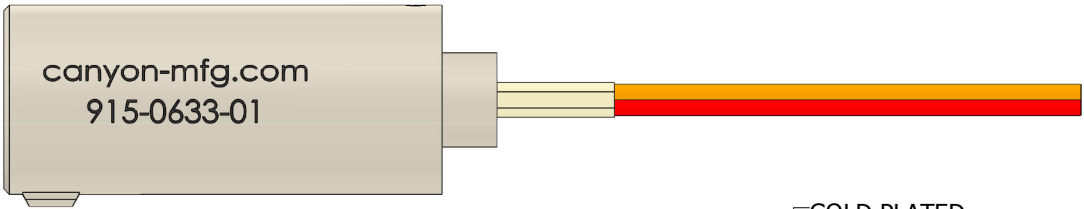

NOTES:

1. TEMPERATURE RATING: 392°F (200°C)
CURRENT: 2 AMPS MAX
INSULATION RESISTANCE = 500M Ω @ 500VDC
2. CONTACTS ARE GOLD PLATED PER CANYON SPEC:
QP-ENG-7.4-001 CURRENT REVISION.
3. WIRE LENGTH TO BE 48" MIN. OR AS DETERMINED BY CUSTOMER.
4. PART NUMBER TO ORDER: 915-0633-01, CURRENT REVISION.
MATING CONNECTOR: 915-0625-01

WIRING DIAGRAM (M22759/43)			
CONTACT	COLOR	WIRE SIZE	LENGTH
1	BLK	24 AWG, 600v, 200°C	48"
2	BRN	24 AWG, 600v, 200°C	48"
3	RED	24 AWG, 600v, 200°C	48"
4	ORN	24 AWG, 600v, 200°C	48"



TITLE: ASSEMBLY, 4-CONDUCTOR
FEMALE, MINI-ROTATABLE
915-0633-01, REV A , SALES