


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
C	CHANGES TO ENHANCE ISOLATION OF HIGH VOLTAGE POSITIONS G AND H -- ECN-10154	1/23/2020	SWright
C.1	ADDED MARKING AREA ON R.E. AXIAL FACE -- ECN-10166	4/7/2020	SWright
C.2	REMOVE REV.# FROM CUSTOMER RELETED LASER ENGRAVING INSTRUCTIONS -- ECN-10228	10/6/2025	SWright

D

C


B

A

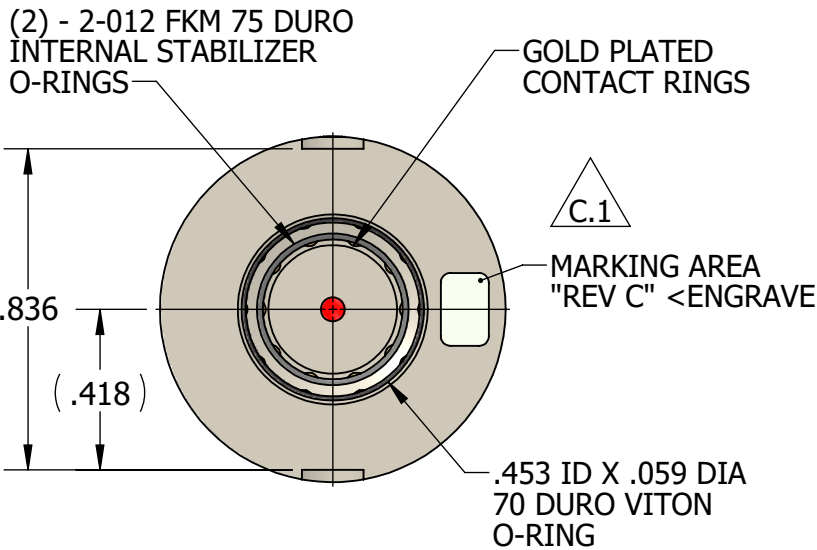


NOTES:

- TEMPERATURE RATING: 392°F (200°C)
CURRENT: 24 AWG WIRE = 2 AMPS MAX
18 AWG WIRE = 4 AMPS MAX
INSULATION RESISTANCE = 500MΩ @ 500VDC
 - CONTACTS ARE GOLD PLATED PER CANYON SPEC:
QP-ENG-7.4-001 CURRENT REVISION.
 - WIRE LENGTH TO BE 24" MIN. OR AS DETERMINED BY CUSTOMER.
 - ORDER PART NUMBER: 915-0194-01, REV C
- 5 HALLIBURTON PART MARKING:
DOC# D01436875 *CURRENT REVISION* & C.2
QR BAR CODE SPECIFICATION # REF. P.O. FOR #
- 6 CANYON PART MARKING: LOGO (Canyon Manufacturing or RimFire)
HES PART # - CURRENT REV.
CMS PART # - CURRENT REV.
WORK ORDER - DATE CODE

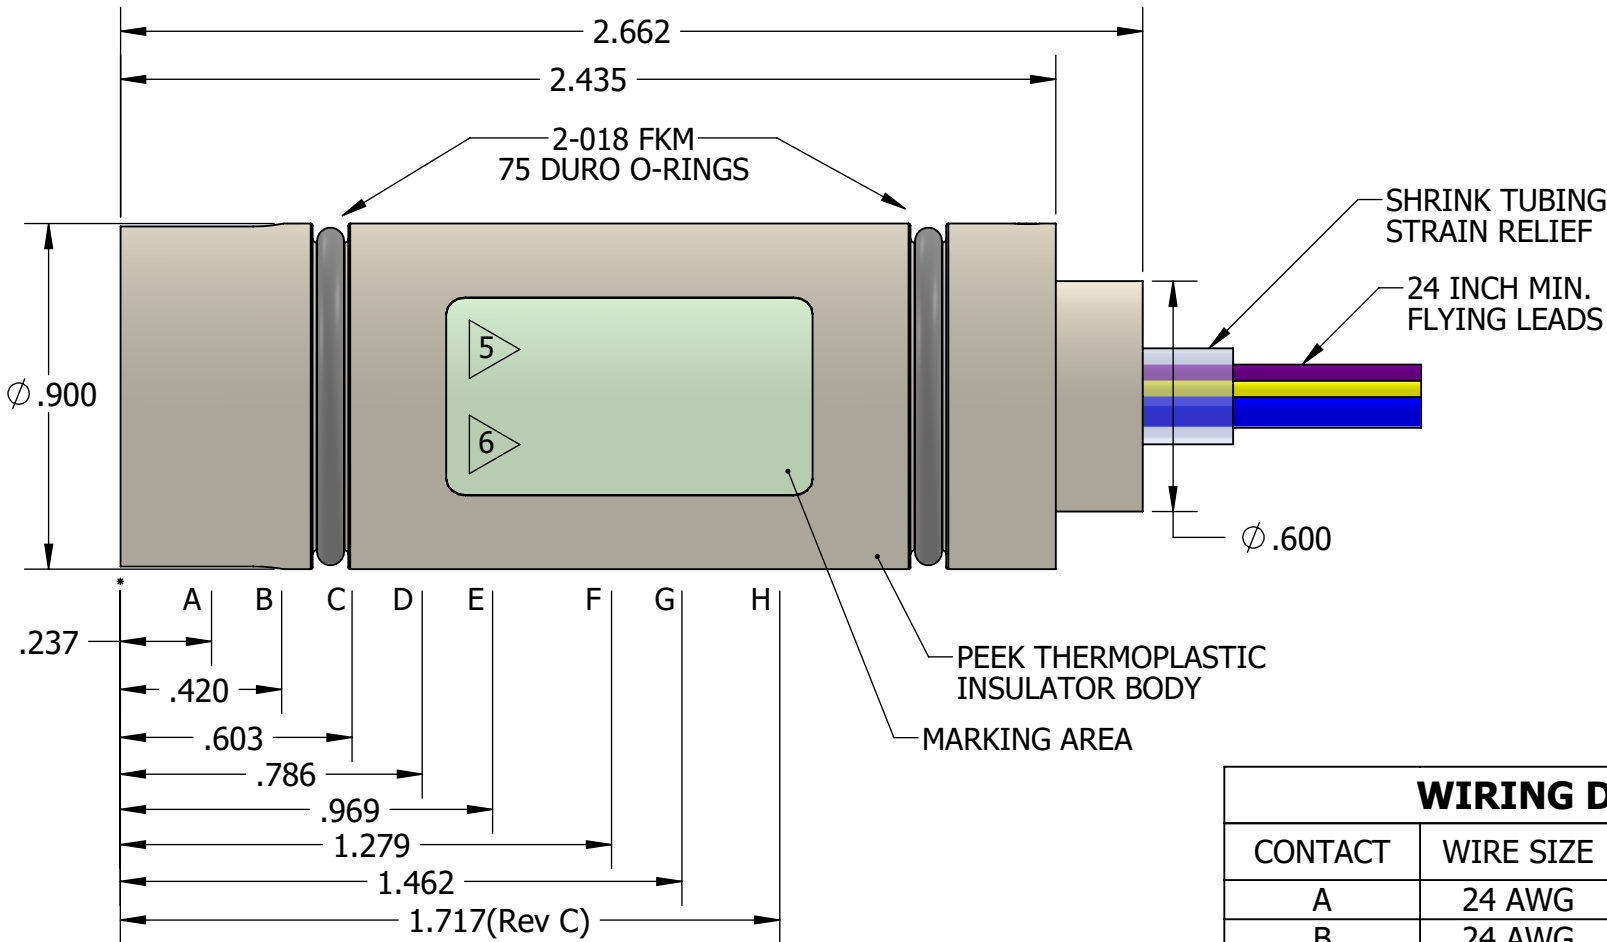

WIRING DIAGRAM

CONTACT	WIRE SIZE	COLOR	LENGTH
A	24 AWG	ORANGE	24"
B	24 AWG	BROWN	24"
C	24 AWG	BLACK	24"
D	24 AWG	GREEN	24"
E	24 AWG	VIOLET	24"
F	24 AWG	YELLOW	24"
G	18 AWG	BLUE	24"
H	18 AWG	RED	24"

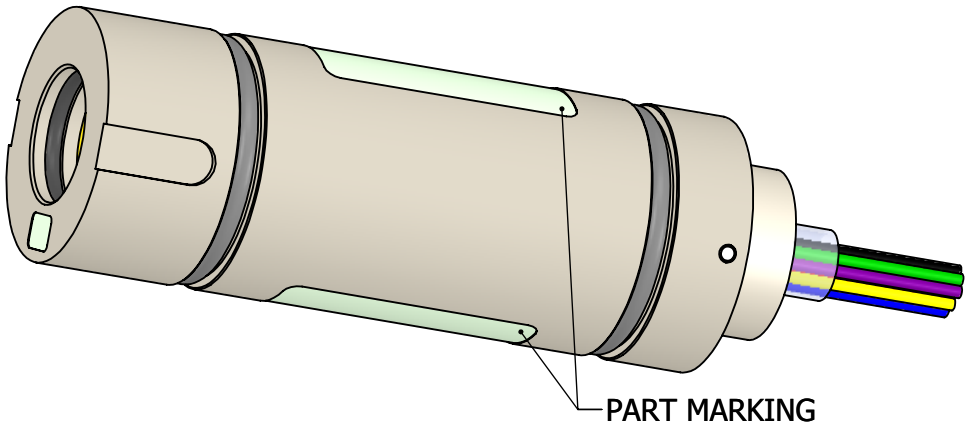

Canyon
Manufacturing Services, Inc.

TITLE: ASSEMBLY, 8 CONDUCTOR,
FEMALE, 200°C
915-0194-01, REV C, SALES

D

C

B

A