
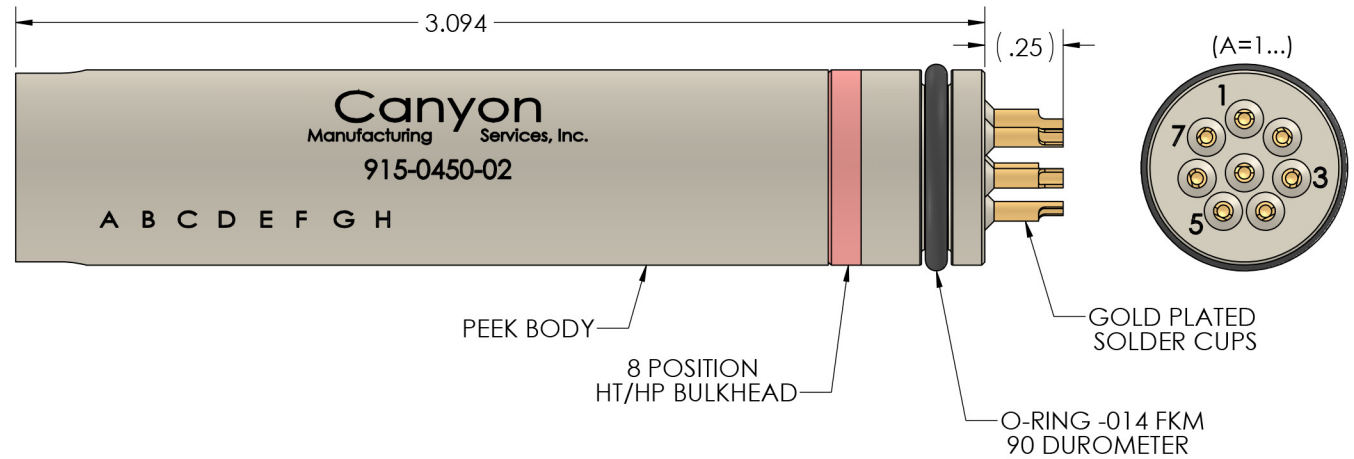


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	4/25/2017	P.B.

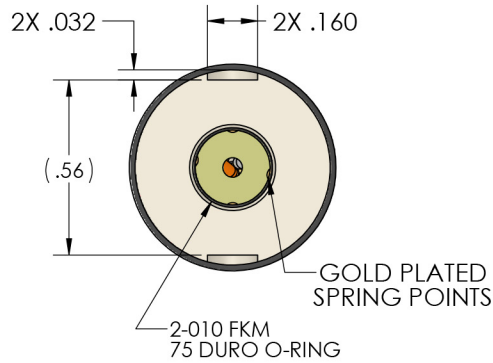

PROPERTIES:

1. TEMPERATURE RATING: 392 °F (200 °C)
PRESSURE RATING: 20,000 PSI
CURRENT: 2 AMPS MAX
INSULATION RESISTANCE = 500M Ω @ 500VDC
2. CONTACTS ARE GOLD PLATED PER CANYON SPEC: QP-ENG-7.4-001 CURRENT REVISION.
3. INSERTION TESTING: 5000 CYCLES ROTATING @ 5 RPM'S.
4. HALT TESTING: COLD STEP STRESS, HOT STEP STRESS, RAPID THERMAL CYCLE, VIBRATION STEP STRESS & COMBINED THERMAL AND VIBRATION.
ENVIRONMENTAL CONDITIONS OF HALT TESTING:
TEMPERATURE RANGE: -40 °C TO +200 °C
VIBRATION: UP TO 80 Grms

Canyon
Manufacturing Services, Inc.

TITLE:
ASSEMBLY, 8 CONDUCTOR,
FEMALE, MINI
915-0450-02, REV A , SALES