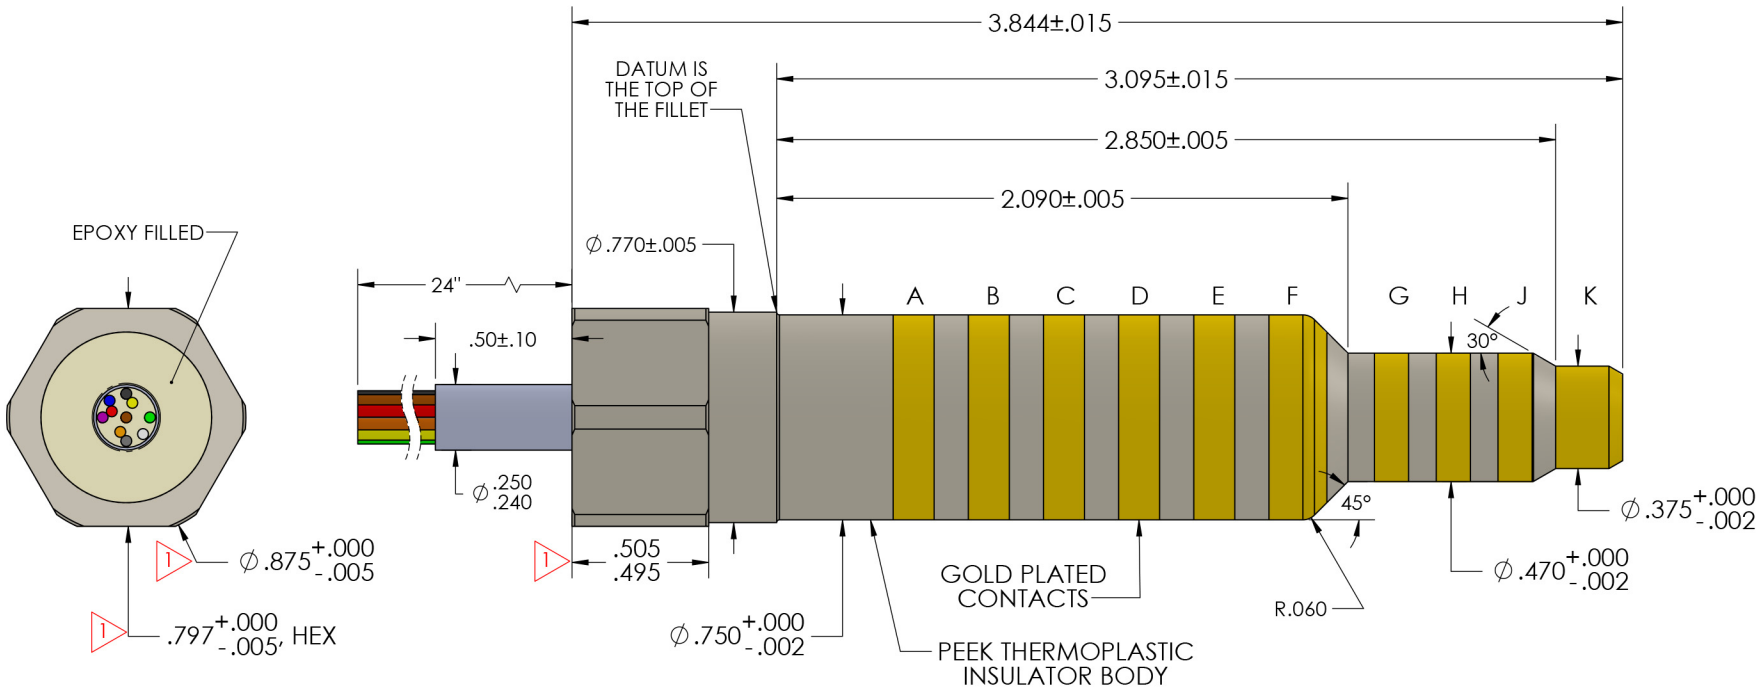

NOTES:

1. TEMPERATURE RATING: 392 F (200° C), CURRENT: 2 AMPS MAX
2. INSULATION RESISTANCE = 500MΩ @ 500VDC
3. CONTACTS ARE GOLD PLATED PER CANYON SPEC: QP-P-ENG-7.4-001 CURRENT REVISION.
4. INSERTION TESTING: 5000 CYCLES {ROTATING @ 5 RPM}
5. HALT TESTING: COLD STEP STRESS, HOT STEP STRESS, RAPID THERMAL CYCLE, VIBRATION STEP STRESS & COMBINED THERMAL / VIBRATION. {TEMPERATURE RANGE: -40˚C TO +200˚C VIBRATION: UP TO 80 G RMS}

1 4/10/2024:
ADJUSTED 3 DIMENSIONS {SWright}

WIRING DIAGRAM (M22759/43)		
CONTACT	WIRE SIZE	COLOR
A	24 AWG	BLACK
B	24 AWG	BROWN
C	24 AWG	RED
D	24 AWG	ORANGE
E	24 AWG	YELLOW
F	24 AWG	GREEN
G	24 AWG	BLUE
H	24 AWG	VIOLET
J	24 AWG	GRAY
K	24 AWG	WHITE

Canyon Manufacturing Services, Inc.

TITLE: ASSY., 10-COND., MALE, LARGE DIA., FLYING LEAD

915-0280-02, REV C, SALES