

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	10/2/2024	SWright

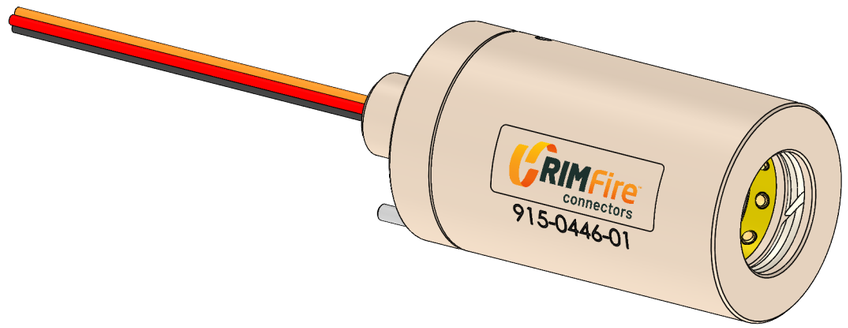


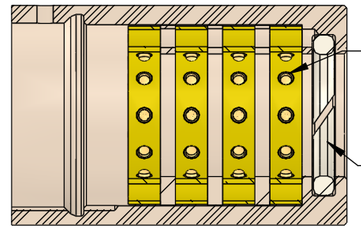

GOLD PLATED
CONTACT POINTS
10 PER CONTACT RING

PEEK STABILIZATION
SPLIT-RING

BODY SECTION VIEW with
CONTACT RINGS & SPLIT-RING

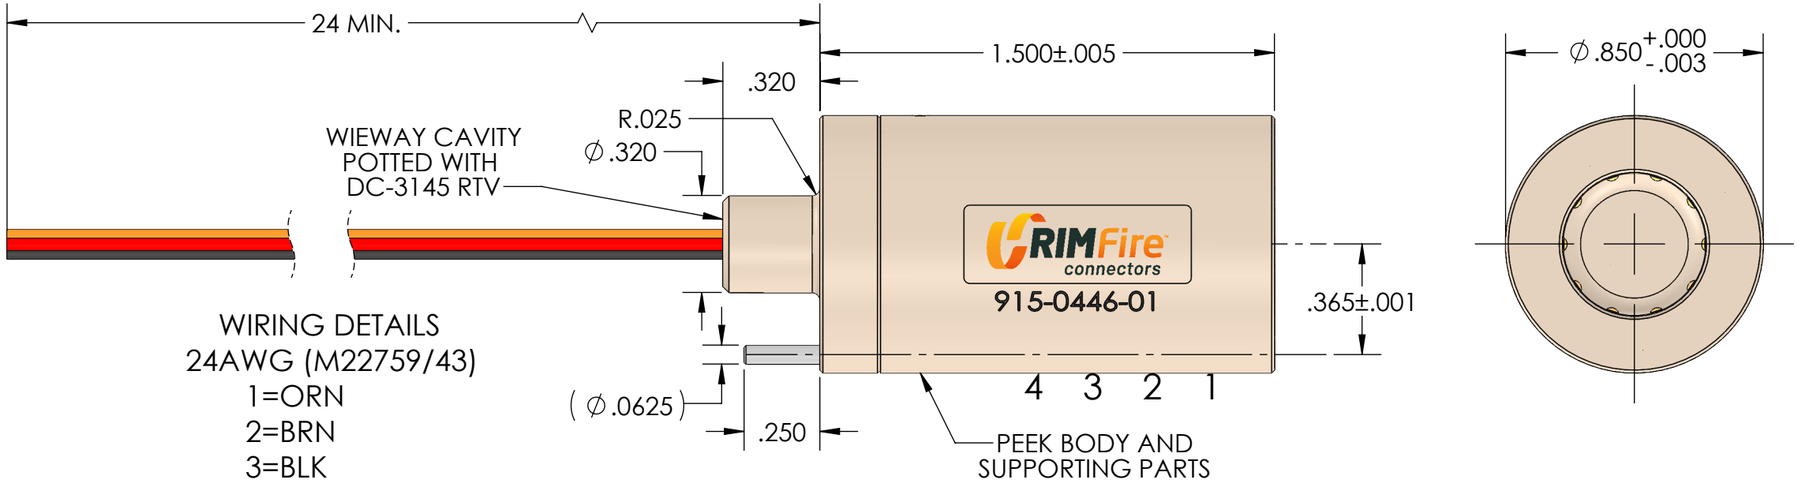

WIRING DETAILS
24AWG (M22759/43)
1=ORN
2=BRN
3=BLK
4=RED

NOTES:
ASSEMBLY., 4-CONDUCTOR, FEMALE, STRAIGHT, STANDARD

1. TEMPERATURE RATING: 392˚F (200˚C)
 CURRENT: 2 AMPS MAX
 INSULATION RESISTANCE = 500M W @ 500VDC @ AMBIENT

2. CONTACTS ARE GOLD PLATED PER CANYON SPEC: QP-ENG-7.4-001 CURRENT REVISION

3. MATING CONNECTOR 915-0390-02, ASSEMBLY., 4-CONDUCTOR, MALE, INJECTED, STRAIGHT, STANDARD

Canyon Manufacturing Services, Inc.

TITLE: ASSEMBLY., 4-CONDUCTOR, FEMALE, STRAIGHT, STANDARD

915-0446-01, REV A, SALES