


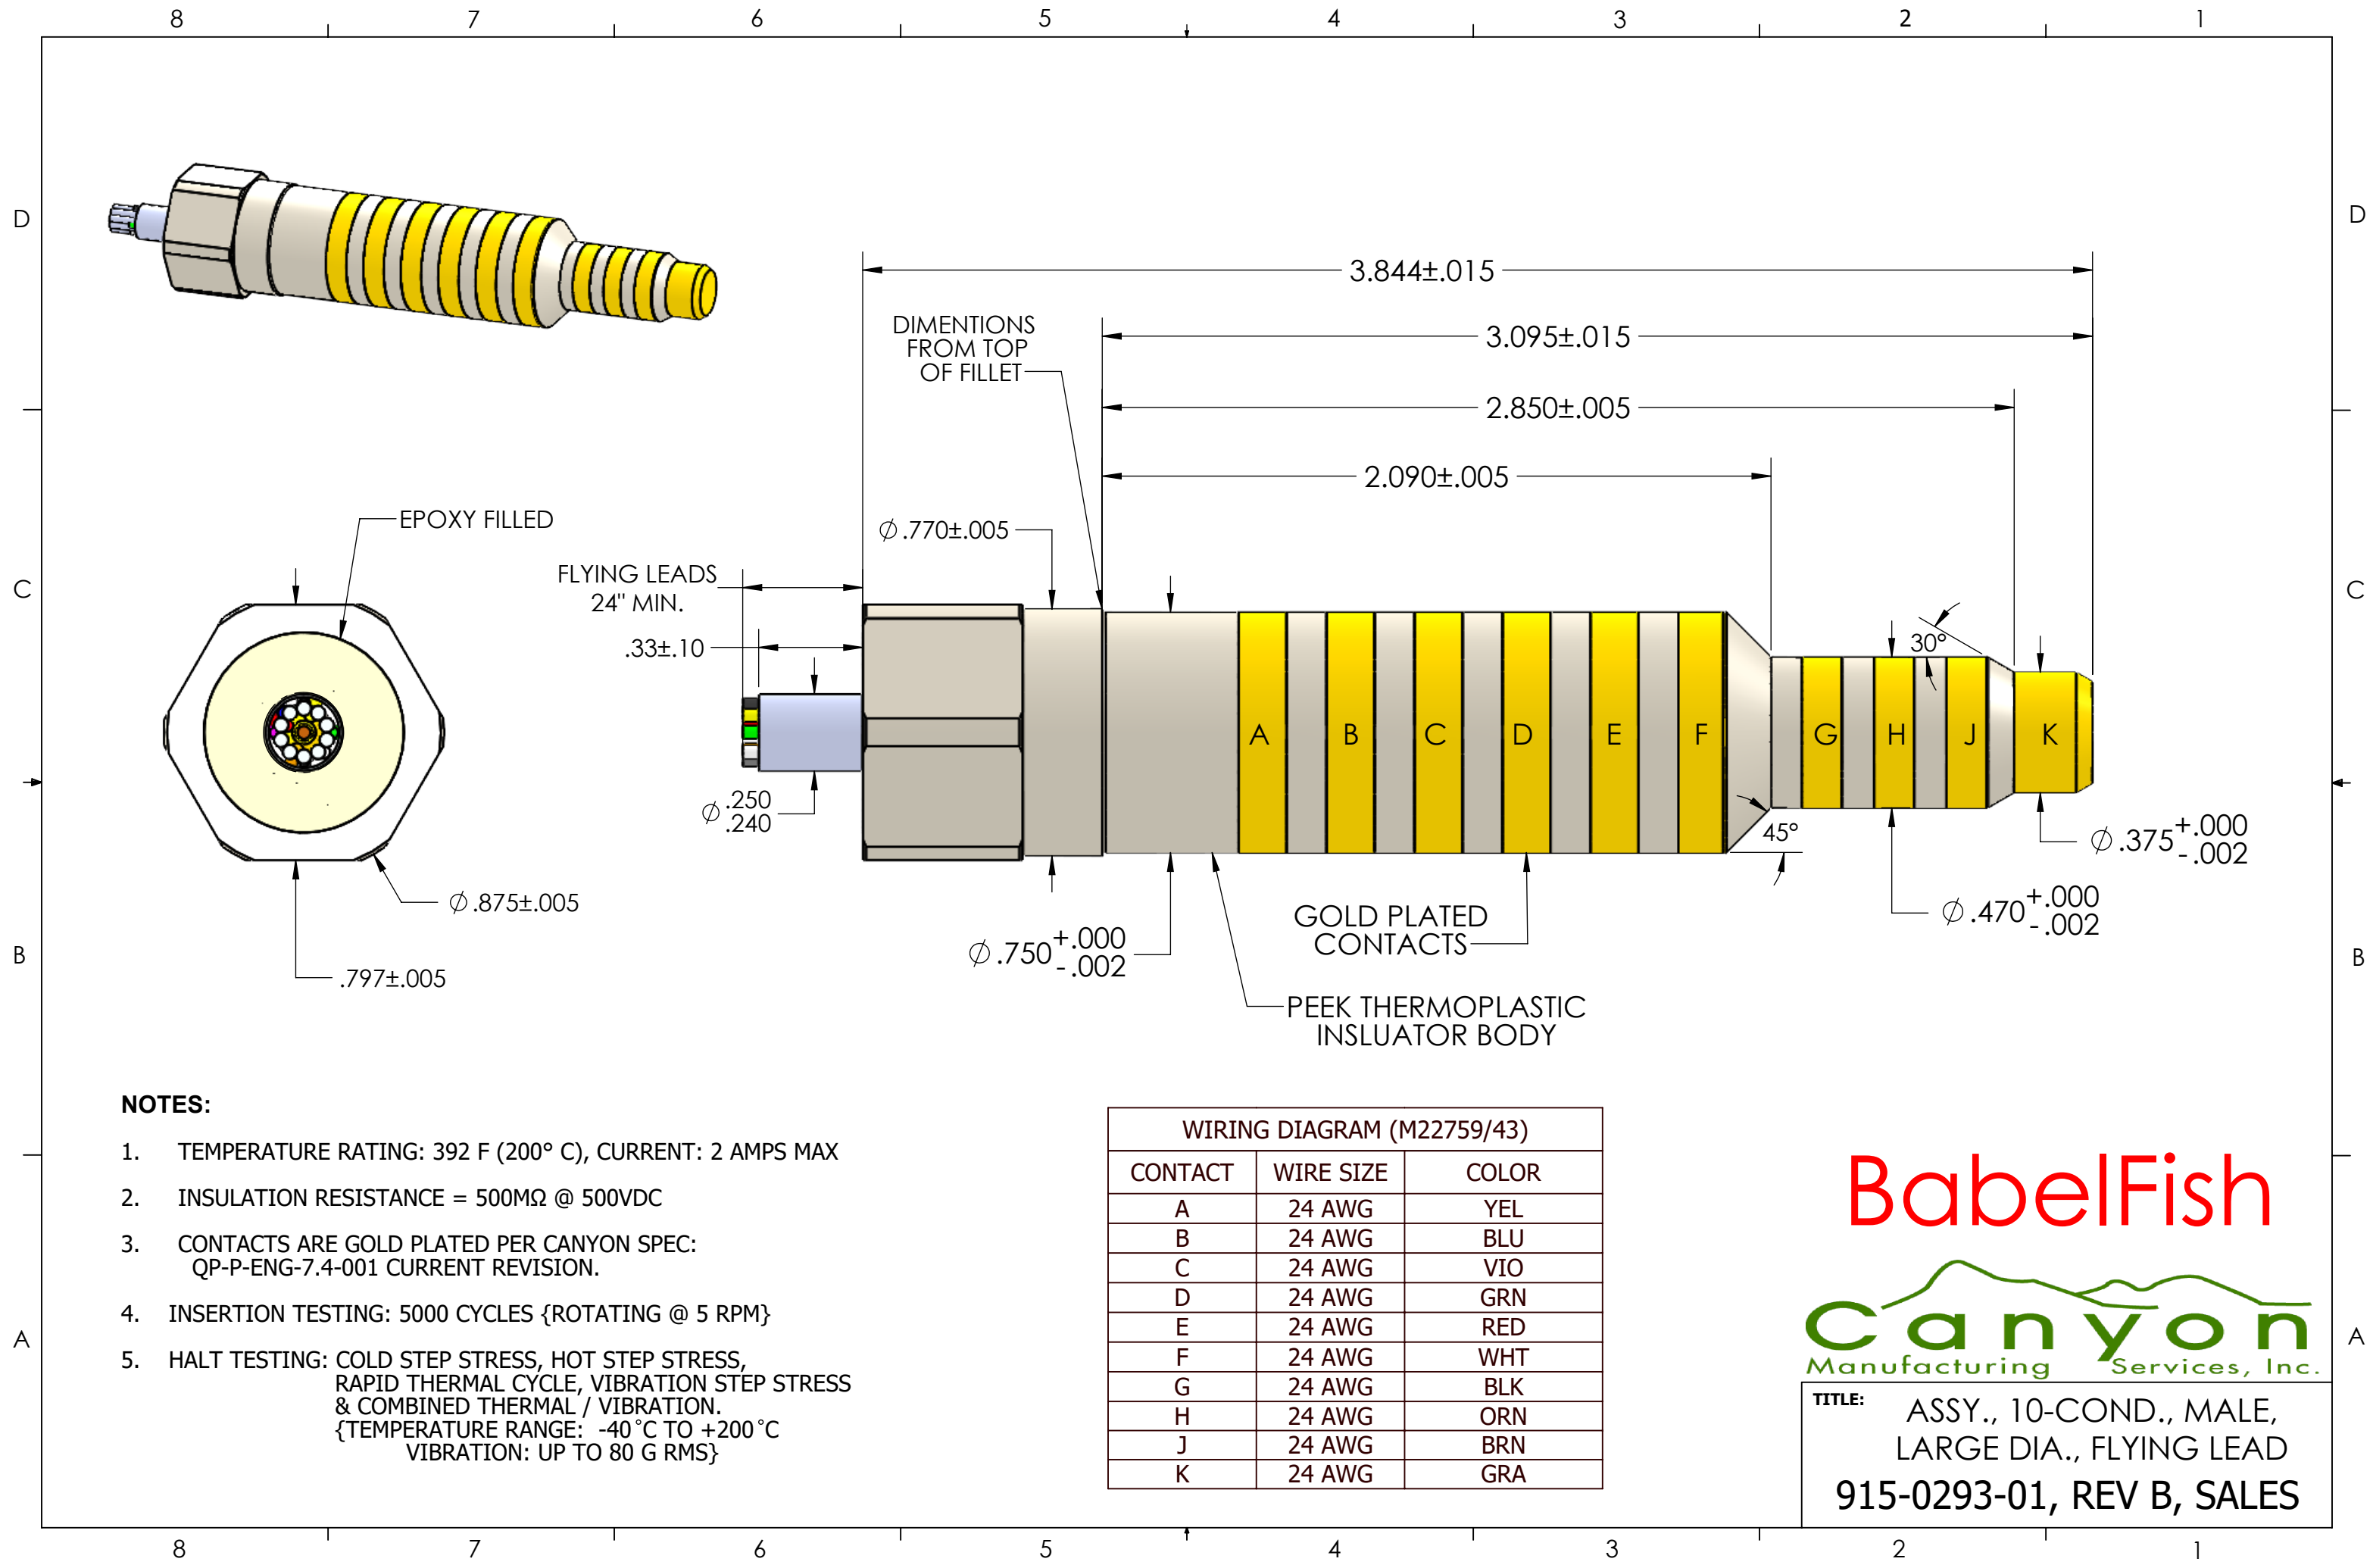

NOTES:

1. TEMPERATURE RATING: 392 F (200° C), CURRENT: 2 AMPS MAX
2. INSULATION RESISTANCE = 500MΩ @ 500VDC
3. CONTACTS ARE GOLD PLATED PER CANYON SPEC:
QP-P-ENG-7.4-001 CURRENT REVISION.
4. INSERTION TESTING: 5000 CYCLES {ROTATING @ 5 RPM}
5. HALT TESTING: COLD STEP STRESS, HOT STEP STRESS,
RAPID THERMAL CYCLE, VIBRATION STEP STRESS
& COMBINED THERMAL / VIBRATION.
{TEMPERATURE RANGE: -40° C TO +200° C
VIBRATION: UP TO 80 G RMS}

WIRING DIAGRAM (M22759/43)		
CONTACT	WIRE SIZE	COLOR
A	24 AWG	YEL
B	24 AWG	BLU
C	24 AWG	VIO
D	24 AWG	GRN
E	24 AWG	RED
F	24 AWG	WHT
G	24 AWG	BLK
H	24 AWG	ORN
J	24 AWG	BRN
K	24 AWG	GRA

BabelFish



Canyon
Manufacturing Services, Inc.

TITLE: ASSY., 10-COND., MALE,
LARGE DIA., FLYING LEAD
915-0293-01, REV B, SALES