



REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
B	CHANGE WIRE LENGTH fm 24"	02/13/2016	P.BALCOM

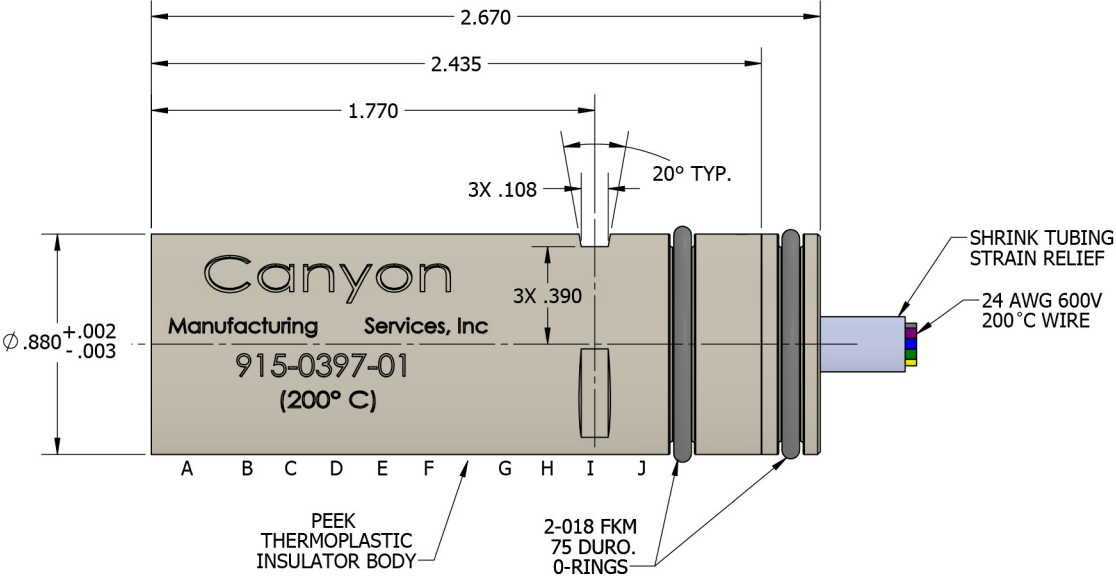

- PROPERTIES:**
- TEMPERATURE RATING: 392°F (200°C)
CURRENT: 2 AMPS MAX
INSULATION RESISTANCE = 500M Ω @ 500VDC
 - CONTACTS ARE GOLD PLATED PER CANYON SPEC: QP-ENG-7.4-001 CURRENT REVISION.
 - INSERTION TESTING: 5000 CYCLES ROTATING @ 5 RPM'S.
 - HALT TESTING:
COLD STEP STRESS, HOT STEP STRESS, RAPID THERMAL CYCLE, VIBRATION STEP STRESS & COMBINED THERMAL AND VIBRATION.
ENVIRONMENTAL CONDITIONS OF HALT TESTING:
TEMPERATURE RANGE: -40 °C TO +200 °C
VIBRATION: UP TO 80 Grms

WIRING DIAGRAM			
CONTACT	WIRE SIZE	COLOR	LENGTH
A	24 AWG	ORANGE	36"
B	24 AWG	BROWN	36"
C	24 AWG	BLACK	36"
D	24 AWG	RED	36"
E	24 AWG	YELLOW	36"
F	24 AWG	GREEN	36"
G	24 AWG	BLUE	36"
H	24 AWG	VIOLET	36"
I	24 AWG	GRAY	36"
J	24 AWG	WHITE	36"

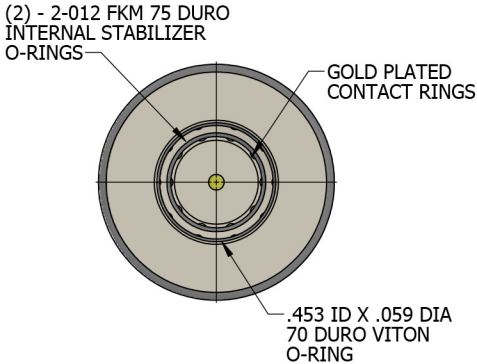

TITLE:
ASSEMBLY, 10 CONDUCTOR FEMALE
ROTATABLE STEPPED NON-STD
915-0397-01, REV B , SALES